

Purdue University Document Delivery



ILLiad TN: 818108

Date: 6/25/2009 02:57:26 PM

Call #: 621.405 Oi5

Journal Title: Oil & Gas Journal

Location: Hicks Repository
(Undergraduate)

Volume: 59

Issue:

Month/Year: 1961

Pages: 115-128

Oil 115

Article Author: C.C. Mattax, J. R. Kyte

Article Title:

Imprint:

CUSTOMER:

Laura Pyrak-Nolte (ljpn)
Faculty
PHYS
Email: ljpn@physics.purdue.edu

469101

** Pages that
contained only
advertisements
are not scanned.*



PURDUE
UNIVERSITY
LIBRARIES

INTERLIBRARY LOAN
DOCUMENT DELIVERY

Access. Knowledge. Success.

*Your request for a document held by the
Purdue University Libraries
has been filled!*

Please review this electronic document as soon as possible. If you have questions about quality or accessibility, please notify Interlibrary Loan via email at docdel@purdue.edu. Please reference the transaction number (TN) listed on the side bar above. Thank you for your request!


NOTICE: This material may be protected by copyright law (Title 17, United States Code)

*omb
06/29/2009*

Ever see a water flood?

A capillary micromodel has been used to study fluid distributions under various wettability conditions, and to find the effects of wettability on water-oil displacement. This article gives the results of these studies, with detailed photographs of the events occurring within the model.

BY C. C. MATTAX AND J. R. KYTE
Jersey Production Research Co., Tulsa

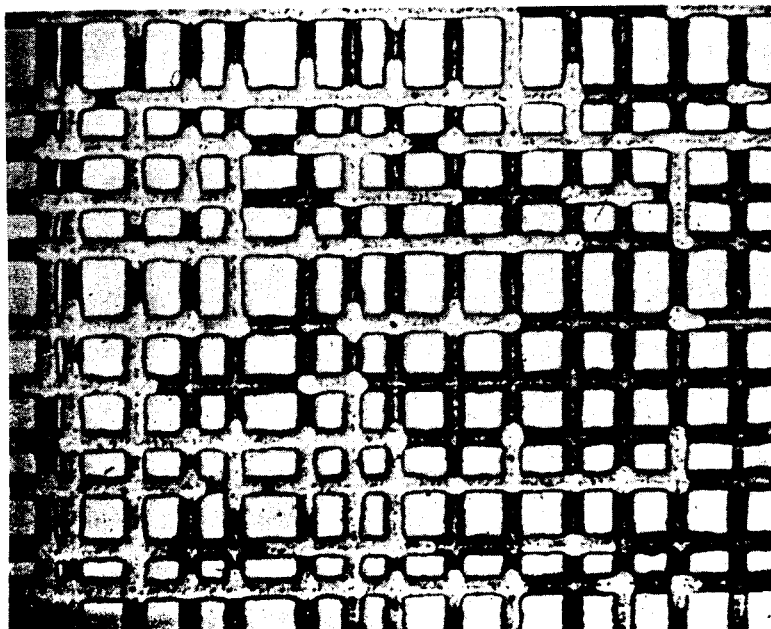


CAPILLARY network in a portion of a micromodel. Fig. 1.

WHAT WE KNOW about multiphase flow through a porous medium is based in part on what we have seen in simple systems such as single capillaries and capillary doublets.^{1 2 3 4}

Visual studies in systems of more complex geometry have been made by Chatenever and coworkers.^{5 6} They used synthetic flow models consisting of single layers of glass beads between two transparent plates. But it is hard to make detailed observations of interface movements.


To improve on these observations, a capillary micromodel was developed in which fluid movement can be seen in detail. The model possesses many of the over-all characteristics of a reservoir rock, and permits observation of fluid movement from pore to pore.

The capillary micromodel is a

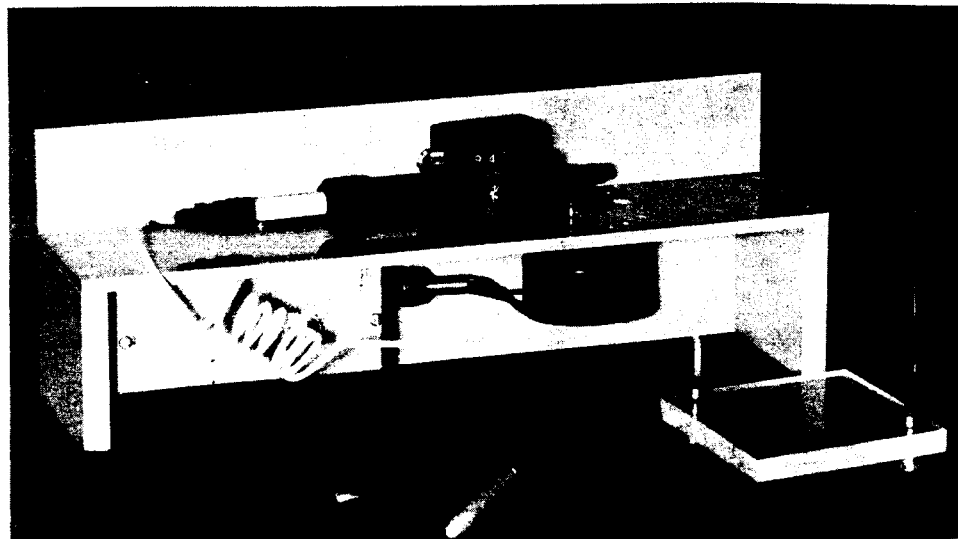


MICROMODEL and auxiliary equipment, including a microburet. Fig. 2.


pipe by the flotation-d
pipe by the push-di
e construction can be c
jacent to the ditch in
il manner but where it
o install heavy timbe
corduroy roads on t
y to support constru
ent.
crossings, the line mu
onform to the profile
ished by the compan
is the top of the pi
ft. below the bottom
ept where solid rock
In those cases, the t
must be at least 6
urface of the rock. T
of crossings must
bottom of the trend
ks of a river are di
contractors are requir
em and protect the
This can be done wi
led with one part ce
en parts sand or wi
e-laying instruction
o the electric-welde
be laid so that the
eam will be withi
o center and consec
ted so that the seam
nate sides of the to
aff. Since Service
the construction a
gn of the line, it ha
ces at Baton Rouge,
ry, Ala., and Colum
supervises the work
the nine main-line
egment, 359 miles
vie to Hattiesburg,
vised from Baton
ntral segment, 344
tiesburg to Griffin,
omery, and the east
les from Griffin to
m Columbia. The
udes a project engi-
pread engineers for
s a six-man inspec-
g with each of the
e chief inspector
inspectors, a coat-
ackfill and cleanup
construction clerk

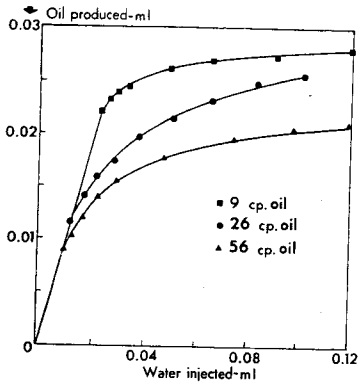

WATER-FLOOD behavior of the capillary micromodel. Fig. 3.

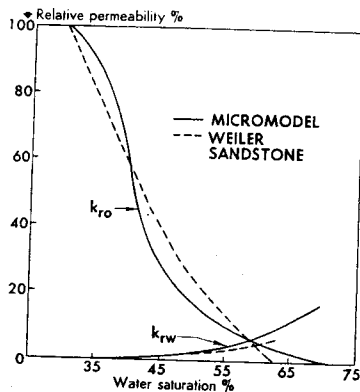

RELATIVE-PERMEABILITY curves from studies of a capillary micromodel and a natural sandstone. Fig. 5.

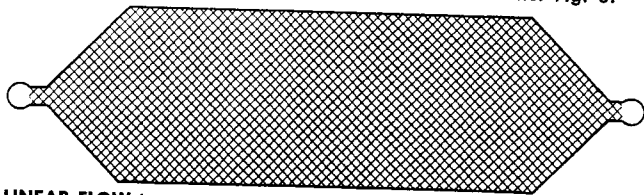


LINEAR FLOW is approached in a capillary micromodel of this type. Fig. 4.

network of interconnecting capillary grooves etched into a flat glass plate. A low-magnification view of part of a micromodel showing oil (transparent) and water (dark) is shown in Fig. 1. A typical model contains about 350 horizontal and 350 vertical capillary grooves intersecting at right angles. If each intersection is considered to represent the end of a pore, a model of this size contains the equivalent of about 250,000 individual pores. In cross-section, each capillary is shaped like a shallow V, from 0.0025 to 0.005 in. wide and from 0.008 to 0.0015 in. in depth. The V-shaped capillary grooves ta-

per off to thin wedges on either side, simulating the grain-to-grain contacts of many natural rocks.

The capillary network is made by coating a glass plate with a thin layer of wax, scribing lines through the wax with a stylus, and then contacting the exposed glass surface with hydrofluoric acid for 1 to 3 minutes. After the wax is removed from the glass plate, a second plate is fused to the first in an annealing oven. Holes which penetrate the capillary network are then drilled through the fused glass plate in any desired pattern. The pore volume of a representative model is about 0.1

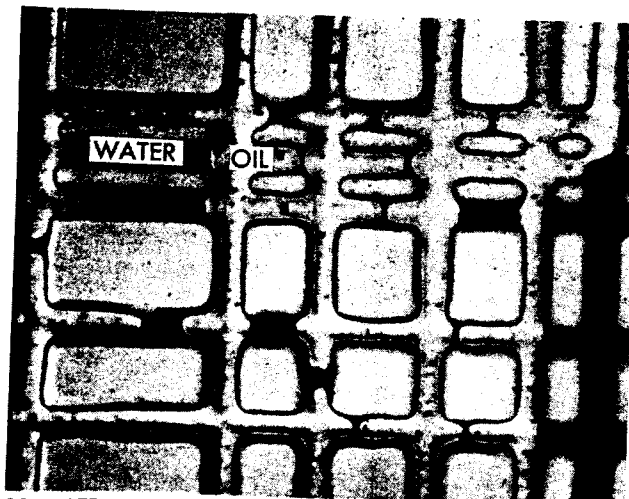

CONNATE-WATER distribution in a strongly water-wet micromodel. Fig. 6.



PENDULAR RINGS and slugs of connate water. Fig. 7.


ml. The models will hold up to 300 psi. internal pressure without fracturing.

A micromodel and the experimental setup used in tests are shown in Fig. 2. A motor-driven microburet is used as a positive-displacement pump for injecting controlled volumes of fluids. Produced fluid is measured in a capillary pipet attached to producing wells in the model. With this arrangement it is possible to get recovery data during a test with an error of less than 3% of pore volume.

Water-flood behavior curves of the micromodel, Fig. 3, were obtained in floods where flow was essentially linear, Fig. 4. From data such as these the water-oil relative-permeability characteristics of the micromodel can be calculated.⁷ The calculated relative-permeability curves are shown in Fig. 5 along with the relative permeability curves obtained on a sample of Weiler sandstone. The relative-permeability functions of the micromodel are quite similar to those of the sandstone core, although the residual-oil saturation in the micromodel is about 5% of pore volume less than that of the Weiler core. Since the behavior of the micromodel is similar to that of the rock, it is probable that the capillary micromodel is a reasonable representation of a natural porous medium.

Static Fluid Distributions, Strongly Water-Wet Systems

Distribution of connate water in the capillary micromodel is shown in Fig. 6. Connate-water saturation

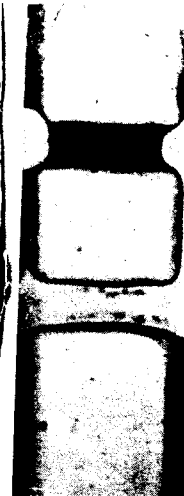

RESIDUAL OIL in a

was established by the model with water with several pores. The water is dark (had been added) and is a refined white oil.

Much of the oil located at the edges of capillary grooves. This is analogous to that observed by Chater; water is also found in thin "membranes" across the pores but do not completely fill them. Fig. 7 is a large photograph showing the capillary grooves are wide but shallow. In sequence, the pendular water extend for a distance away from the pores.

Distribution of water residual-oil saturation in micromodel is shown though this view covers only about 0.004 sq. representative of the fluid over the entire model. residual-oil pockets occur over very short distances the pockets occur or four pores, although the residual-oil pocket 20 to 30 pores. Very residual oil is in the spherical droplets. The conditions are similar to the never.⁵

Slightly Water-Wet

There has been considerable during the pas

will hold up to 300
pressure without frac-

nel and the experi-
ed in tests are shown
motor-driven micro-
; a positive-displace-
injecting controlled
ids. Produced fluid
a capillary pipet at-
lucing wells in the
is arrangement it is
recovery data during
ror of less than 3%


behavior curves of
, Fig. 3, were ob-
ls where flow was
r, Fig. 4. From data
e water-oil relative-
aracteristics of the
be calculated.⁷ The
lative-permeability
vn in Fig. 5 along
permeability curves
sample of Weiler
relative-permeability
e micromodel are
those of the sand-
ough the residual-
the micromodel is
re volume less than
ler core. Since the
micromodel is simil-
rock, it is probable
y micromodel is a
sentation of a nat-
ium.

**Distributions
er-Wet Systems**

f connate water in
romodel is shown
te-water saturation



ite water. Fig. 7.

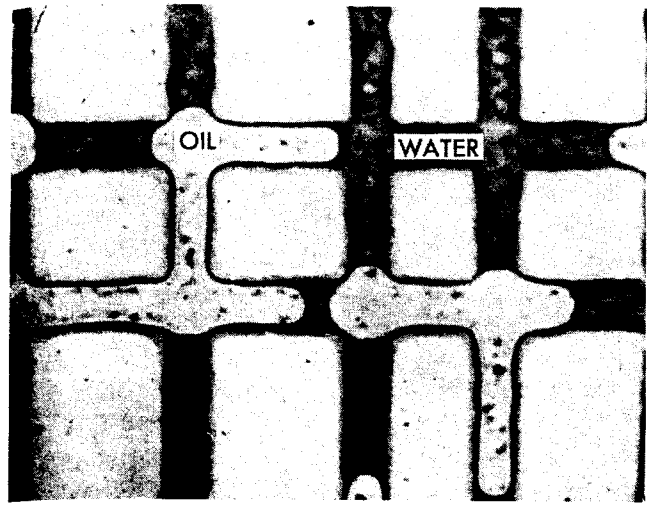


RESIDUAL OIL in a strongly water-wet micromodel. Fig. 8.

was established by first saturating the model with water, then flushing with several pore volumes of oil. The water is dark (an inorganic dye had been added) and the oil, which is a refined white oil, is transparent. Much of the connate water is located at the edges of the V-shaped capillary grooves. This configuration is analogous to the pendular rings observed by Chatenever.⁵ Connate water is also found as "slugs" or thin "membranes" which stretch across the pores but do not completely fill them. Fig. 7 is an enlarged photograph showing pendular rings and two of the water slugs. The capillary grooves in this case are wide but shallow and, as a consequence, the pendular rings of water extend for a considerable distance away from the walls of the pores.

Distribution of water and oil at residual-oil saturations in a linear micromodel is shown in Fig. 8. Although this view covers an area of only about 0.004 sq. in., it is representative of the fluid distributions over the entire model. Continuous residual-oil pockets usually extend over very short distances. In most cases the pockets occupy only three or four pores, although infrequently the residual-oil pockets extend over 20 to 30 pores. Very little of the residual oil is in the form of free spherical droplets. These observations are similar to those of Chatenever.⁵

Slightly Water-Wet Systems

There has been considerable speculation during the past few years

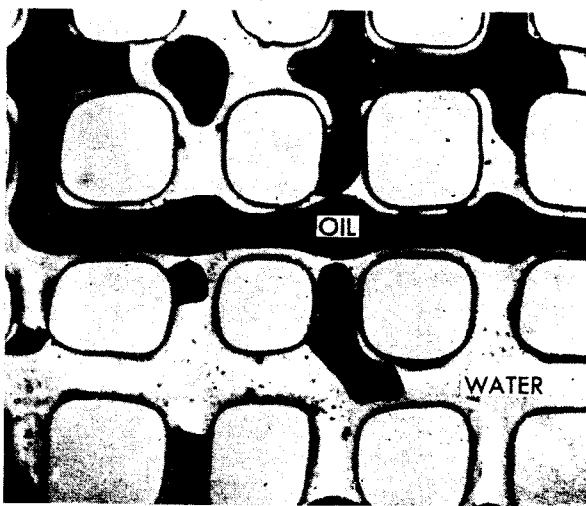

FLUID DISTRIBUTION in a slightly water-wet micromodel. Fig. 9.

about the true nature of a slightly water-wet surface. By analogy with work on single crystal faces and in capillary tubes, a slightly water-wet porous medium is often visualized as a medium whose surface has been uniformly altered to increase the angle of contact of the water-oil interface at the rock surface. The model is visualized as having a surface of essentially uniform wettability.

The second explanation of wettability variation considers that the rock surface is heterogeneous. As a consequence of surface heterogeneities, the "wettability" of the rock is a localized characteristic varying from point to point. This explanation forms the basis for the work of Fatt⁸ and Holbrook.⁹ It is often termed the "Dalmation" or "spotted" wettability concept. Visual evidence of the validity of the concept is shown in Fig. 9. The model was made slightly water-wet by first saturating it with brine and then flushing to connate water with a selected crude oil, after which the fluids were allowed to remain in contact with the model for several hours.

Examination of individual contact angles shows that some areas in the model are strongly water-wet, whereas other areas are strongly oil-wet. In this condition the water-flood behavior and imbibition behavior of the model are similar to those of a natural, slightly water-wet rock sample.¹⁰ Thus, rock surfaces of intermediate wettability are probably mixtures of strongly water-wet and strongly oil-wet surfaces.





Effect of oil-wet surfaces on the size of residual-oil formations is shown in Fig. 10. Residual-oil pockets are usually larger when the micromodel is slightly water-wet than when it is strongly water-wet. However, in either case residual-oil pockets usually extend over only a few pore diameters.

**Mechanisms of Water-Oil
Displacement**

With the capillary micromodel three principal mechanisms of flow have been observed in water-oil displacements. These are:

- Channel flow of oil and water.
- Flow of water through pendular rings into water slugs.
- Flow of oil through oil filaments which connect two or more oil-filled pores.

Channel flow. Oil is displaced primarily by channel flow, both in strongly water-wet and in intermediate wettability systems. In channel flow the water-oil interface moves essentially as a piston. Each fluid moves through its own network of interconnected pores and both flowing phases remain continuous throughout the entire period of oil production. Whenever the oil phase becomes discontinuous, it will remain trapped as residual oil. No migration of the trapped oil pockets can be induced until the water-injection rate is drastically increased. At very high flow rates, however, the oil can be made to break up into isolated slugs or globules, and in this state part or all of the residual oil can be produced. These observa-

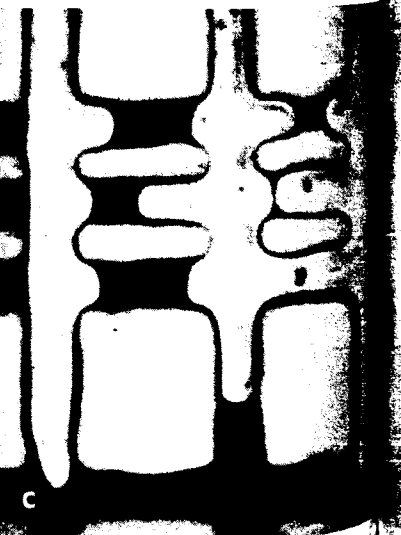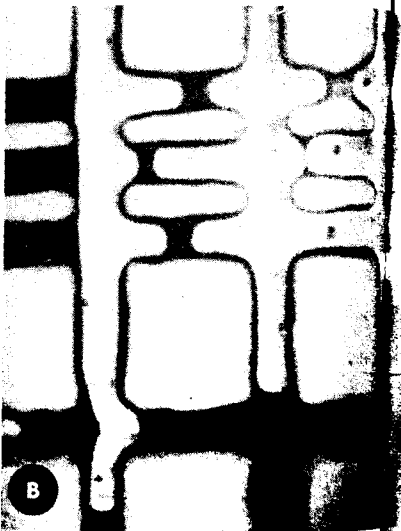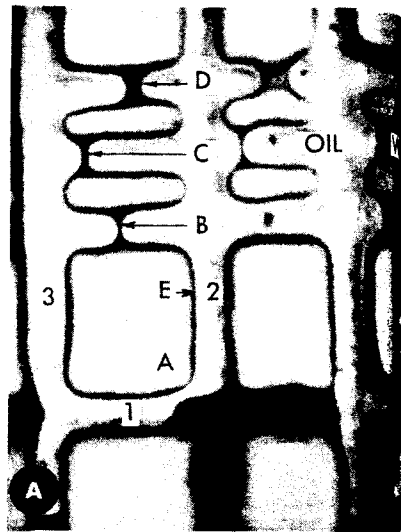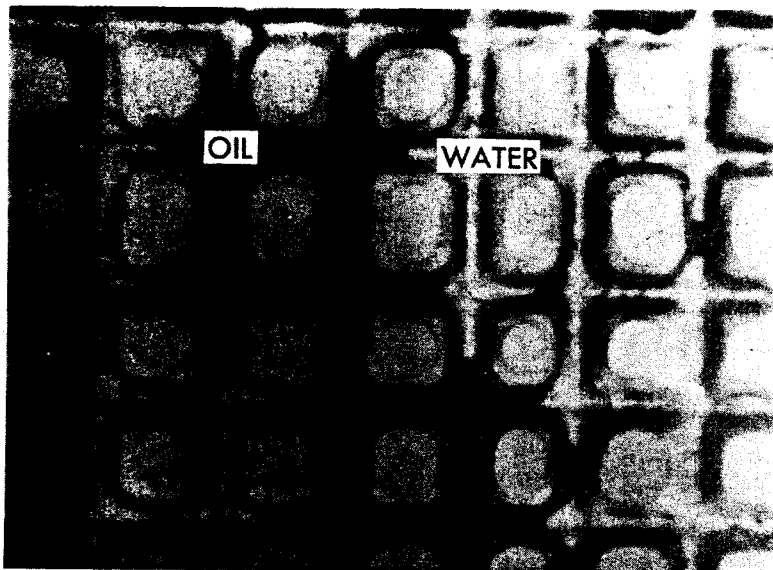

GROWTH OF WATER SLUGS in a strongly water-wet system. Fig. 11.

RESIDUAL-OIL POCKET in a slightly oil-wet micromodel. Fig. 10.

tions are consistent with the findings of Chatenever and Calhoun.⁵

Flow of water through pendular rings. As mentioned earlier, some of the connate water in a strongly water-wet system is found as slugs which stretch across pores but do not fill them completely. The water slugs connect two pendular rings of water. It has been observed that water can flow through the pendular rings, causing the water slugs to grow. This is another mechanism for the transport of water in a strongly water-wet system. The mechanism is illustrated in Fig. 11. Fig. 11a shows the advancing water front just before the oil-water interface touches the wall of a pore at point A.

Fig. 11b shows the advancing water after it has contacted the opposite wall of the pore and has imbibed a short distance into pore 1. It can be seen that the water slugs B, C, and D have become slightly enlarged at this stage. It is apparent that the pendular ring of water, E, has served as a flow line between the main water front and the water slugs.

Fig. 11c shows that the size of the water slugs has greatly increased before the water advances into pores 2 and 3. The rate of growth of the water slugs is indicated by the fact that only 2 seconds elapsed between the time photographs a and c were taken. This is conclusive evidence of the mobility of the water in the pendular rings. This mechanism for

water movement tends to smooth the water front during a flood, thereby increasing the efficiency of the process.

Filament flow of oil. Frequently, in systems of intermediate wettability, oil in pores behind the water front is connected to oil in pores ahead of the water front by thin filaments of oil, Fig. 12. It is probable that the filaments form because parts of the model are oil-wet and, thus, a continuous film of oil "sticks" to one pore wall. Studies using various oils, including refined white oils, indicate that viscous interfacial films are not necessary for filament formation.

As the water flood progresses, oil will flow through the filament and "drain" from the partially trapped oil pocket. Eventually, the filament will rupture and a droplet of residual oil will form. Photographs illustrating this sequence of events are shown in Figs. 12a, b, and c.

Oil cannot move over long distances by filament flow. However, observations indicate that in slightly water-wet models, moderate volumes of oil move in this way. Filament flow does not occur in strongly water-wet micromodels.

Effect of Wettability on Sweep Efficiency

Sweep efficiency in a water flood of a slightly water-wet micromodel is much lower than that obtained in a strongly water-wet model. Decreased efficiency under slightly

OIL

THE



LOUIS

OIL
ROBERT F. CASHEE

When you
Quincy
you find it
EVERYWHERE

In the center of a production field, Quincy Authorize your telephone. Factor respond to your call by more than one hundred parts for all Quincy models. When you specify a Quincy diesel applications, you availability of service at the clock. Models from 1 to 90 free catalog.

QUINCY COMPLETE
Makers of the World

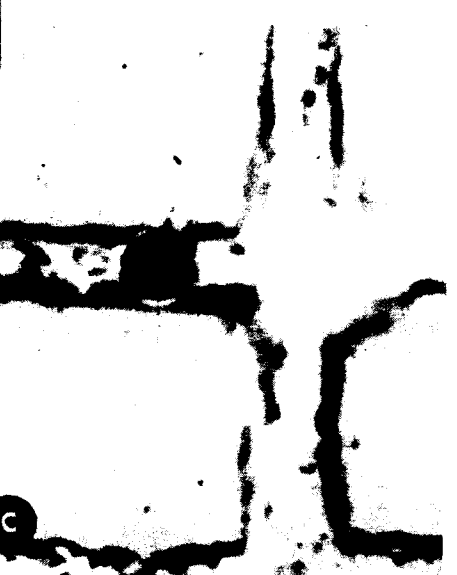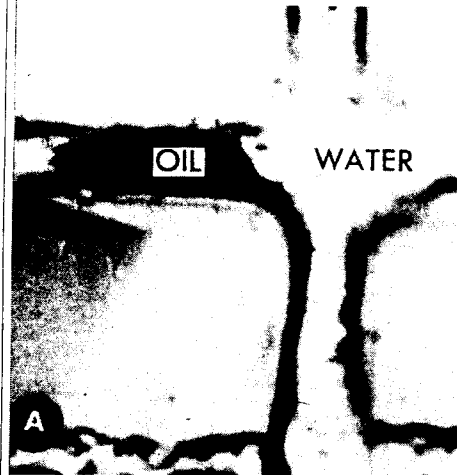

FILAMENT FLOW of oil in a slightly water-wet micromodel. Fig. 12.

water-wet conditions results from the formation and growth of water "fingers." The initial phase of finger development is shown in Fig. 13. This photograph was taken after the injection of about 2% of pore volume of water in a micromodel containing a Middle East crude oil and connate water. The oil-water viscosity ratio is about 8 to 1. The model in this case represents one-quarter of a five-spot flood pattern. The injection well is at the lower left; the producing well is at the upper right. The length of a finger increases much more rapidly than does its width. This is because water imbibition forces are weak and viscous forces, which favor finger development at this viscosity ratio, are dominant. This effect is further illustrated in Fig. 14, which is an enlarged view of two of the fingers.

Development and growth of water fingers result in an early water breakthrough. Fig. 15 shows that, at water breakthrough, large areas of the slightly water-wet model have not been swept. Thus, to produce the slightly water-wet model to residual oil requires the injection and production of several pore volumes of water.

Areal coverage in a flood of a strongly water-wet model is much more favorable than that shown above. This is because strong capillary forces pull water from the fingers into areas where oil has been bypassed. As a result, finger formation is inhibited and finger growth is retarded.

Figs. 16 and 17 illustrate this point. These photographs were taken during a water flood of a strongly water-wet model containing an 8-cp. white oil. The viscosity ratio was 8 to 1, the same as in the slightly water-wet flood. The model used in this test contained two areas of high permeability (the dotted areas in Fig. 16) which were not present in the model used in the slightly water-wet flood. The high-permeability areas were introduced to encourage finger formation and more clearly illustrate the benefits of strong imbibition forces on areal coverage. Fig. 16 shows the model after the injection of 6% of pore volume of water. (The water is the dark phase in the photographs.) At this stage a large water finger has formed in one of the high-permeability areas. Otherwise, however, the model is



FINGER FORMATION in a water flood of a slightly water-wet micromodel. Fig. 13.




FINGERS from Fig. 13 are enlarged in this view. Fig. 14.

AREAL COVERAGE at water breakthrough in a slightly water-wet micromodel. Fig. 15.



Time Cy
Finger-
GUIBEI
Inter

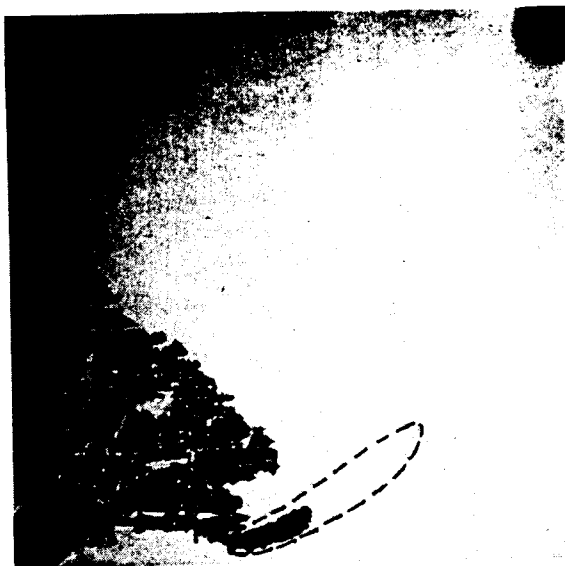

AREAL COVERAGE in a strongly water-wet micromodel is shown when injected water amounted to 6% of the pore volume, Fig. 16, left, and at water breakthrough, Fig. 17, right. The dotted lines of Fig. 16 enclose two high-permeability areas.

being very efficiently swept by water.

Coverage at water breakthrough is shown in Fig. 17. Note that the finger shown in Fig. 16 has disappeared, although some oil near this finger has been trapped and cannot be recovered. Water has now fingered through the second high-permeability area and, also, through the center of the pattern. For the most part, however, efficient coverage of the model has been obtained at water breakthrough.

It is apparent that reduced water-wetness of the reservoir rock will result in decreased flooding efficiency, not only because of an unfavorable effect on relative permeabilities, but also because areal coverage is severely reduced.

Acknowledgment

The authors express appreciation to Jersey Production Research Co. for permission to publish this article. Part of the work was sponsored by Arabian American Oil Co., whose participation is gratefully acknowledged.

The authors conclude . . .

1. The similarity between the relative-permeability functions of the micromodel and those of natural rock indicates that the model is a reasonable representation of natural porous media. Comparison of the water-flood performance of the micromodel and rocks under various wettability conditions supports this general conclusion.

2. Reservoir rock surfaces of intermediate wettability are probably mixtures of strongly water-wet and strongly oil-wet surfaces. The oil-wet surfaces promote water fingering and reduce the efficiency of a water-oil displacement process:

3. Channel flow of oil and water is the principal flow mechanism in both strongly water-wet and intermediate wettability systems.

4. Flow of water through pendular rings is a second mechanism for water movement in strongly water-wet media. This type of water movement helps to smooth the flood front in a water flood, reducing the severity of water fingering.

5. Noticeable volumes of oil move through oil filaments in rocks of intermediate wettability.

References

1. Yuster, S. T., "Theoretical Considerations of Multiphase Flow in Idealized Capillary Systems": Proceedings Third World Petroleum Congress, E. J. Brill, Leiden (1951) Sec. II, 437.
2. Templeton, C. C., and Rushing, S. S., Jr., "Oil-Water Displacements in Microscopic Capillaries": *Pet. Tech.* (1956) 8, 211.
3. Johansen, R. T., and Dunning, H. N., "Homogeneous Fluid Flow Through Consolidated Porous Media": *J. Colloid Science* (1957) 12, 68.
4. Lowman, W., "Microscopic Studies of Capillary Flow": A film produced by the petroleum and natural-gas department, Pennsylvania State College, August 1950.
5. Chatenever, Alfred, and Calhoun, John C., Jr., "Visual Examinations of Fluid Behavior in Porous Media. Part I": *Trans. AIME* (1952) 195, 149.
6. Chatenever, Alfred, Indra, Mohit K., and Kyte, J. R., "Microscopic Observations of Solution Gas-Drive Behavior": *J. Pet. Tech.*, June 1959.
7. Johnson, E. F., Bossler, D. P., and Naumann, V. O., "Calculation of Relative Permeability from Displacement Experiments": *J. Pet. Tech.*, Tech. Note 2027, January 1959.
8. Fatt, Irving, and Klikoff, W. A., Jr., "Effect of Fractional Wettability on Multiphase Flow through Porous Media": Presented at the fortieth national meeting, AIChE, SPE, Kansas City, May 1959.
9. Holbrook, O. C., and Bernard, G. C., "Determination of Fractional Wettability of Oil-Field Cores by Dye Adsorption": Paper No. 806-G, AIME meeting, Dallas, October 1957.
10. Bobek, J. E., Mattax, C. C., and Denekas, M. O., "Reservoir Rock Wettability—Its Significance and Evaluation": *Trans. AIME* (1958) 213, 155.

Film available

Some of the figures in this article are clipped from a motion picture that Jersey engineers have made of the micromodel in action. This film is available for loan by writing to Dr. R. N. Meinert, Jersey Production Research Co., 1133 North Lewis, Tulsa, Okla.