

Physics 42200
Waves & Oscillations

Lecture 34 – Interference

Spring 2015 Semester

Matthew Jones

Interference

- Electric field:

$$\vec{E}(\vec{x}, t) = \vec{E}_0 \cos(\vec{k} \cdot \vec{x} - \omega t)$$

- Light intensity:

$$I = c\epsilon \left\langle |\vec{E}|^2 \right\rangle_T$$

- Two electric fields:

$$\vec{E}_1(\vec{x}, t) = \vec{E}_{10} \cos(\vec{k} \cdot \vec{x} - \omega t + \xi_1)$$


$$\vec{E}_2(\vec{x}, t) = \vec{E}_{20} \cos(\vec{k} \cdot \vec{x} - \omega t + \xi_2)$$

- Light intensity:

$$I = v\epsilon \left\langle |\vec{E}_1 + \vec{E}_2|^2 \right\rangle_T$$

Interference

$$I = v\epsilon \langle |\vec{E}_1 + \vec{E}_2|^2 \rangle_T$$

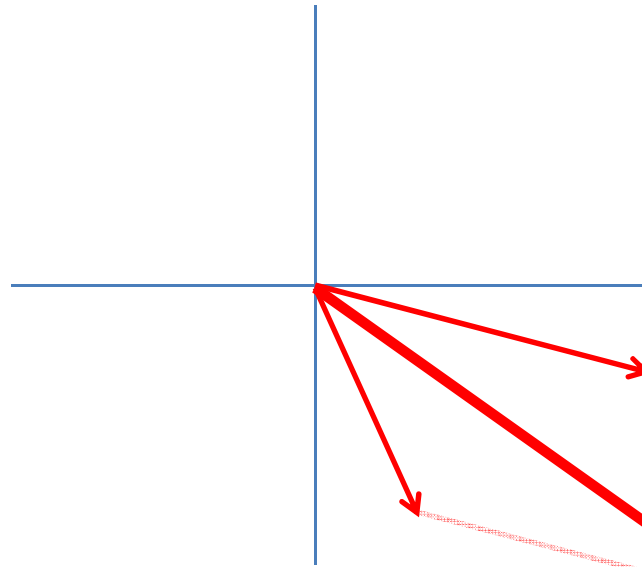

$$\begin{aligned} |\vec{E}_1 + \vec{E}_2|^2 &= (\vec{E}_1 + \vec{E}_2) \cdot (\vec{E}_1 + \vec{E}_2) \\ &= |\vec{E}_1|^2 + |\vec{E}_2|^2 + 2\vec{E}_1 \cdot \vec{E}_2 \end{aligned}$$

$$I = v\epsilon \left\langle |\vec{E}_1|^2 \right\rangle_T + v\epsilon \left\langle |\vec{E}_2|^2 \right\rangle_T + 2v\epsilon \langle \vec{E}_1 \cdot \vec{E}_2 \rangle_T$$

Interference

$$I = v\epsilon \left\langle |\vec{E}_1|^2 \right\rangle_T + v\epsilon \left\langle |\vec{E}_2|^2 \right\rangle_T + 2v\epsilon \langle \vec{E}_1 \cdot \vec{E}_2 \rangle_T$$
$$= I_1 + I_2 + I_{12}$$

$$I_{12} = v\epsilon \vec{E}_{01} \cdot \vec{E}_{02} \cos \delta$$

Phase difference: $\delta = \vec{k}_1 \cdot \vec{x} - \vec{k}_2 \cdot \vec{x} + \xi_1 - \xi_2$

- Why didn't we care about I_{12} when discussing geometric optics?
 - Incoherent light: $\langle I_{12} \rangle = 0$
 - Random polarizations
 - Path lengths long compared with λ : $\langle I_{12} \rangle = 0$
 - Many possible paths for light to propagate along

Interference

- Another way to have $I_{12} = 0$ is when the electric fields are orthogonal:

$$I = I_1 + I_2 + I_{12}$$

$$I_{12} = v\epsilon \vec{E}_{01} \cdot \vec{E}_{02} \cos \delta$$


- If the two electric fields correspond to opposite polarization, then there is no interference
- If the two electric fields are parallel (same polarization), then

$$I_{12} = 2\sqrt{I_1 I_2} \cos \delta$$

- Interference depends on the phase difference

Interference

- Two point sources:

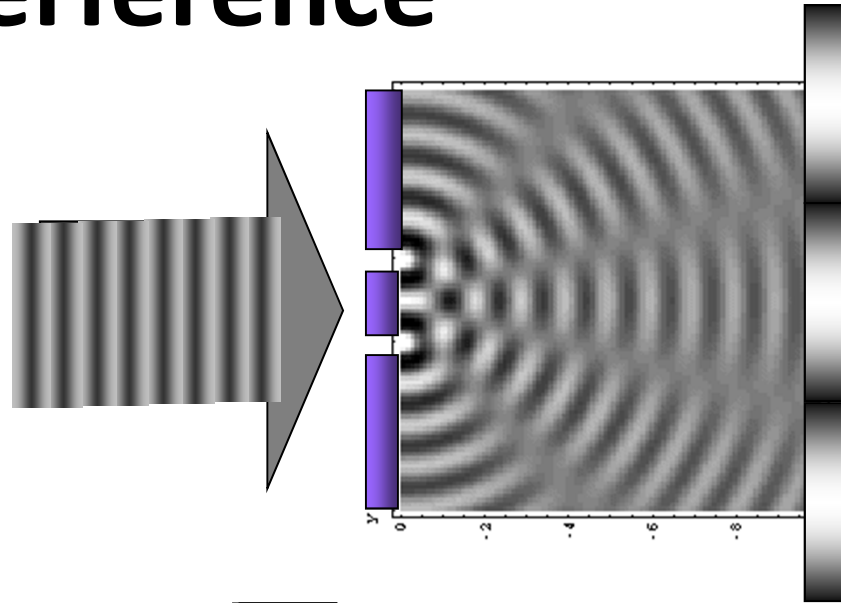

$$I = I_1 + I_2 + 2\sqrt{I_1 I_2} \cos \delta$$

- Constructive interference: $\cos \delta > 0$
- Total constructive interference: $\cos \delta = 0, \pm 2\pi, \dots$
- Destructive interference: $\cos \delta < 0$
- Total destructive interference: $\cos \delta = \pm \pi, \pm 3\pi, \dots$
- Special case when $\vec{E}_{01} = \vec{E}_{02}$:

$$I = 2I_0(1 + \cos \delta) = 4I_0 \cos^2 \frac{\delta}{2}$$

Conservation of Energy

- Energy should be conserved...
- The intensity is greater than the incoherent sum in some places, but less than the incoherent sum in other places:

$$I = I_1 + I_2 + I_{12}$$
$$I_{12} = v\epsilon \vec{E}_{01} \cdot \vec{E}_{02} \cos \delta$$


- Positive definite: I_1 and I_2
- Positive and negative: I_{12}
- Spatial average of I_{12} is zero

Interference Maxima and Minima

$$I = 2I_0(1 + \cos \delta) = 4I_0 \cos^2 \frac{\delta}{2}$$

(when $\vec{E}_{01} = \vec{E}_{02}$)

- Recall that $\delta = \vec{k}_1 \cdot \vec{x} - \vec{k}_2 \cdot \vec{x} + \xi_1 - \xi_2$
- Consider the following case:
 - the sources are at different positions
 - $|\vec{k}_1| = |\vec{k}_2| = k$
 - the sources are in phase, $\xi_1 - \xi_2 = 0$


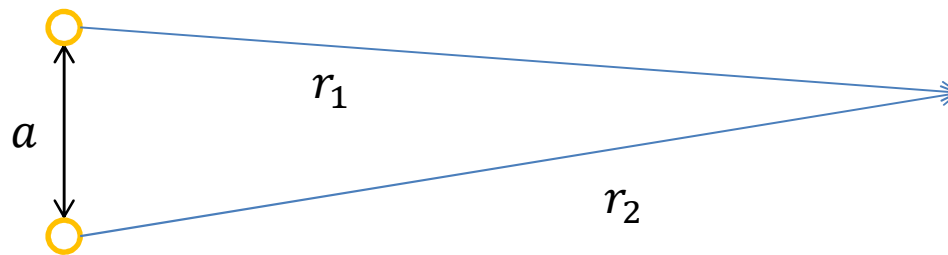


Interference Maxima and Minima

$$\begin{aligned}\delta &= \vec{k}_1 \cdot \vec{x} - \vec{k}_2 \cdot \vec{x} + \xi_1 - \xi_2 \\ &= k(r_1 - r_2)\end{aligned}$$


$$I = 4I_0 \cos^2 \frac{\delta}{2} = 4I_0 \cos^2 \frac{1}{2} k(r_1 - r_2)$$

- Maximum when $(r_1 - r_2) = \frac{2\pi m}{k} = m\lambda$, $m = 0, \pm 1, \pm 2, \dots$
- Minimum when $(r_1 - r_2) = \frac{\pi m'}{k} = \frac{m'}{2}\lambda$, $m' = \pm 1, \pm 3, \dots$

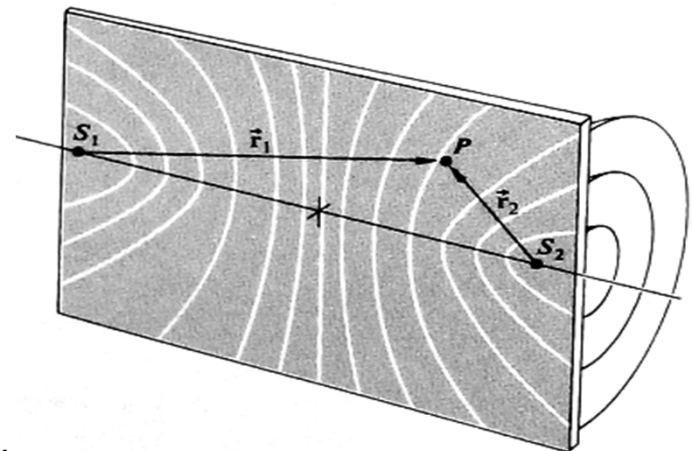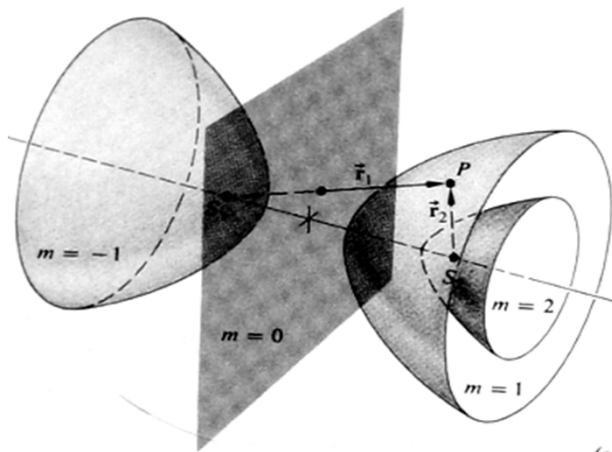


hyperboloid of revolution

Young's Double-Slit Experiment

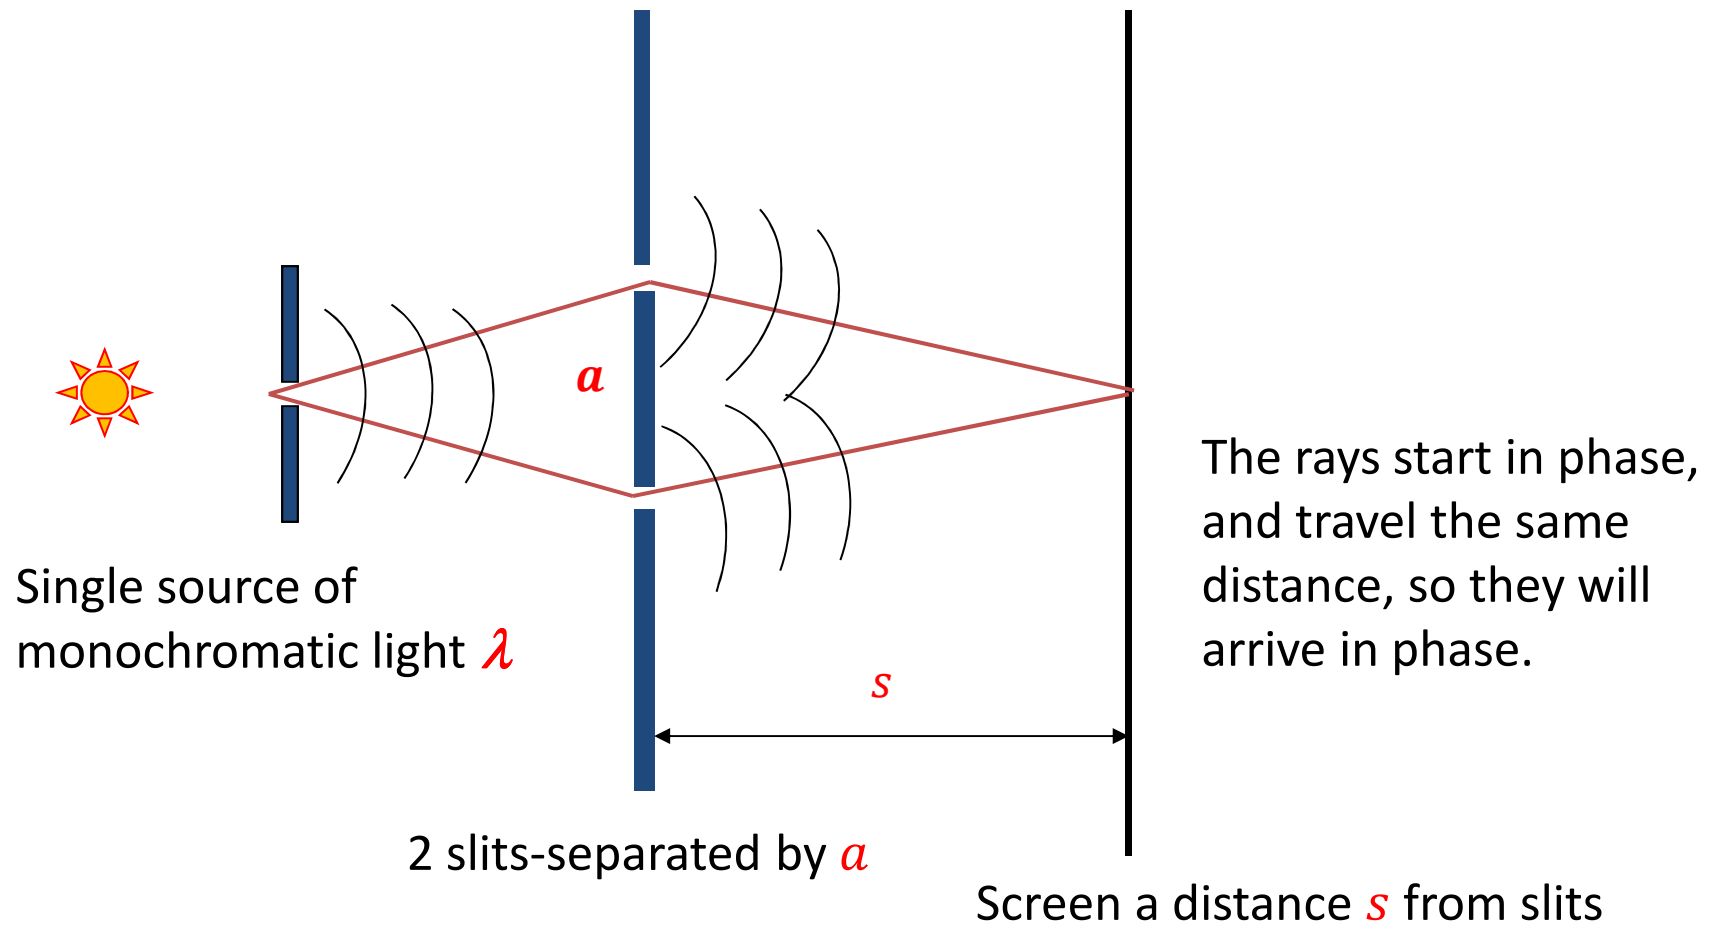

Young's Double-Slit Experiment: Screen

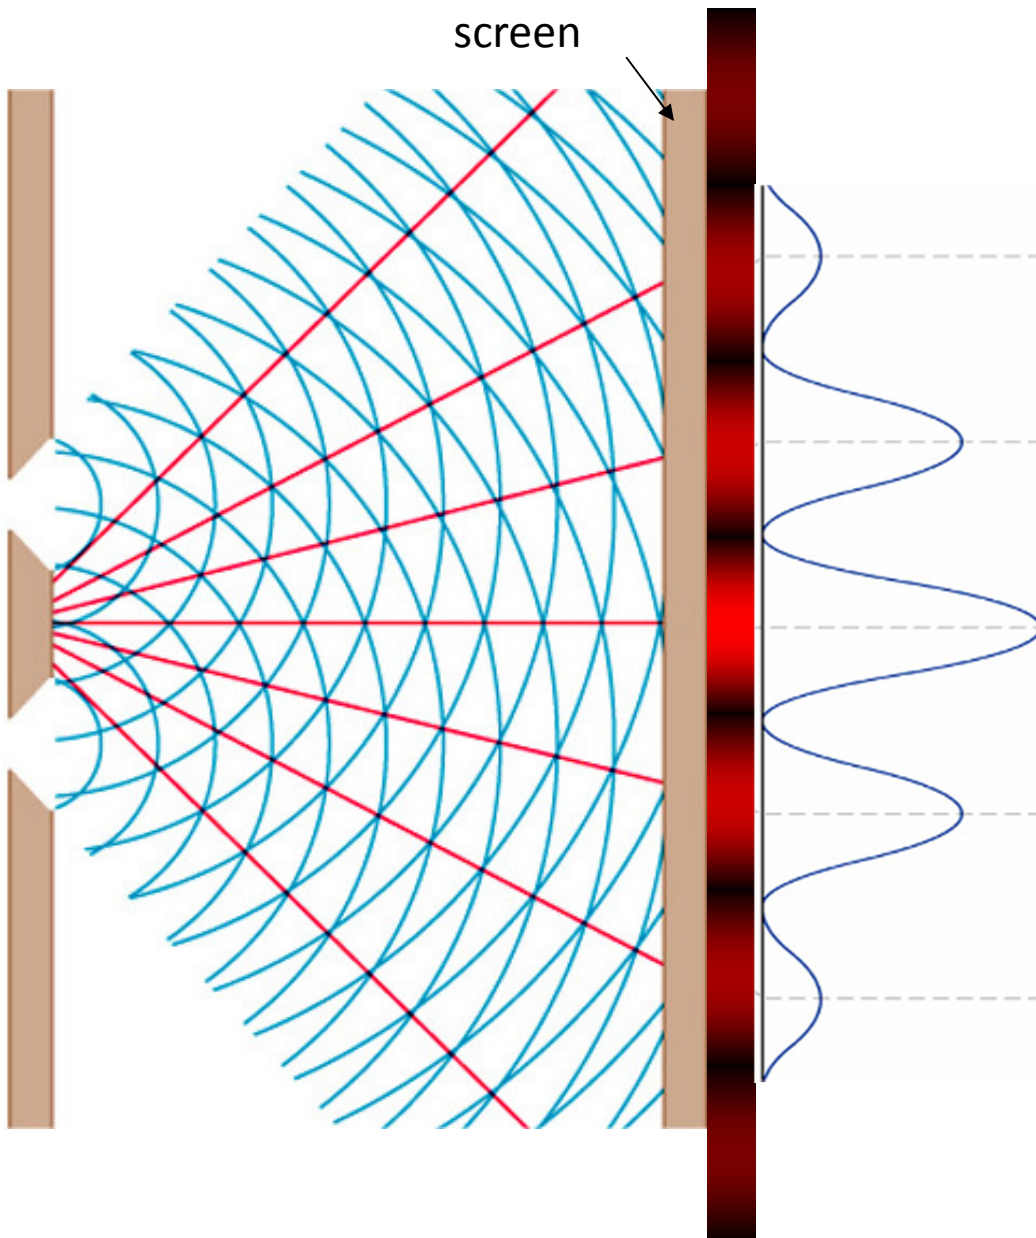


Path difference changes across the screen:

Sequence of minima and maxima

At points where the difference in path length is $0, \pm\lambda, \pm 2\lambda, \dots$, the screen is bright, (constructive).

At points where the difference in path length is $\pm \frac{\lambda}{2}, \pm \frac{3\lambda}{2}, \dots$, the screen is dark, (destructive).

Young's Double-Slit Experiment

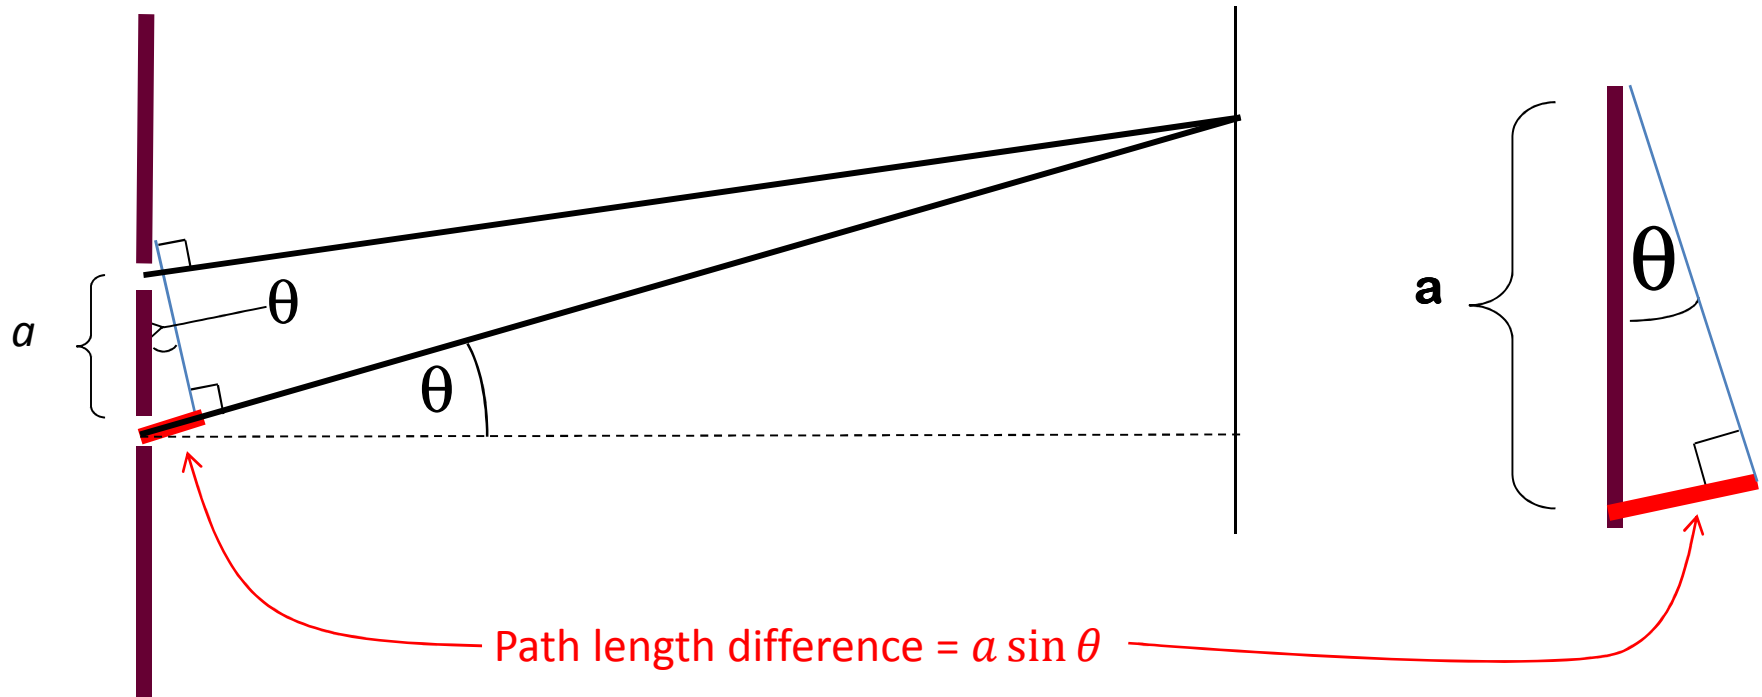

Constructive interference $a \sin \theta = m\lambda$


Destructive interference $a \sin \theta = \left(m + \frac{1}{2}\right)\lambda$

where $m = 0, \pm 1, \pm 2, \dots$


Need $\lambda < a$ for distinct maxima

Example

Two slits 0.46 mm apart are 500 cm away from the screen. What would be the distance between the zero'th and first maximum for light with $\lambda=532$ nm?

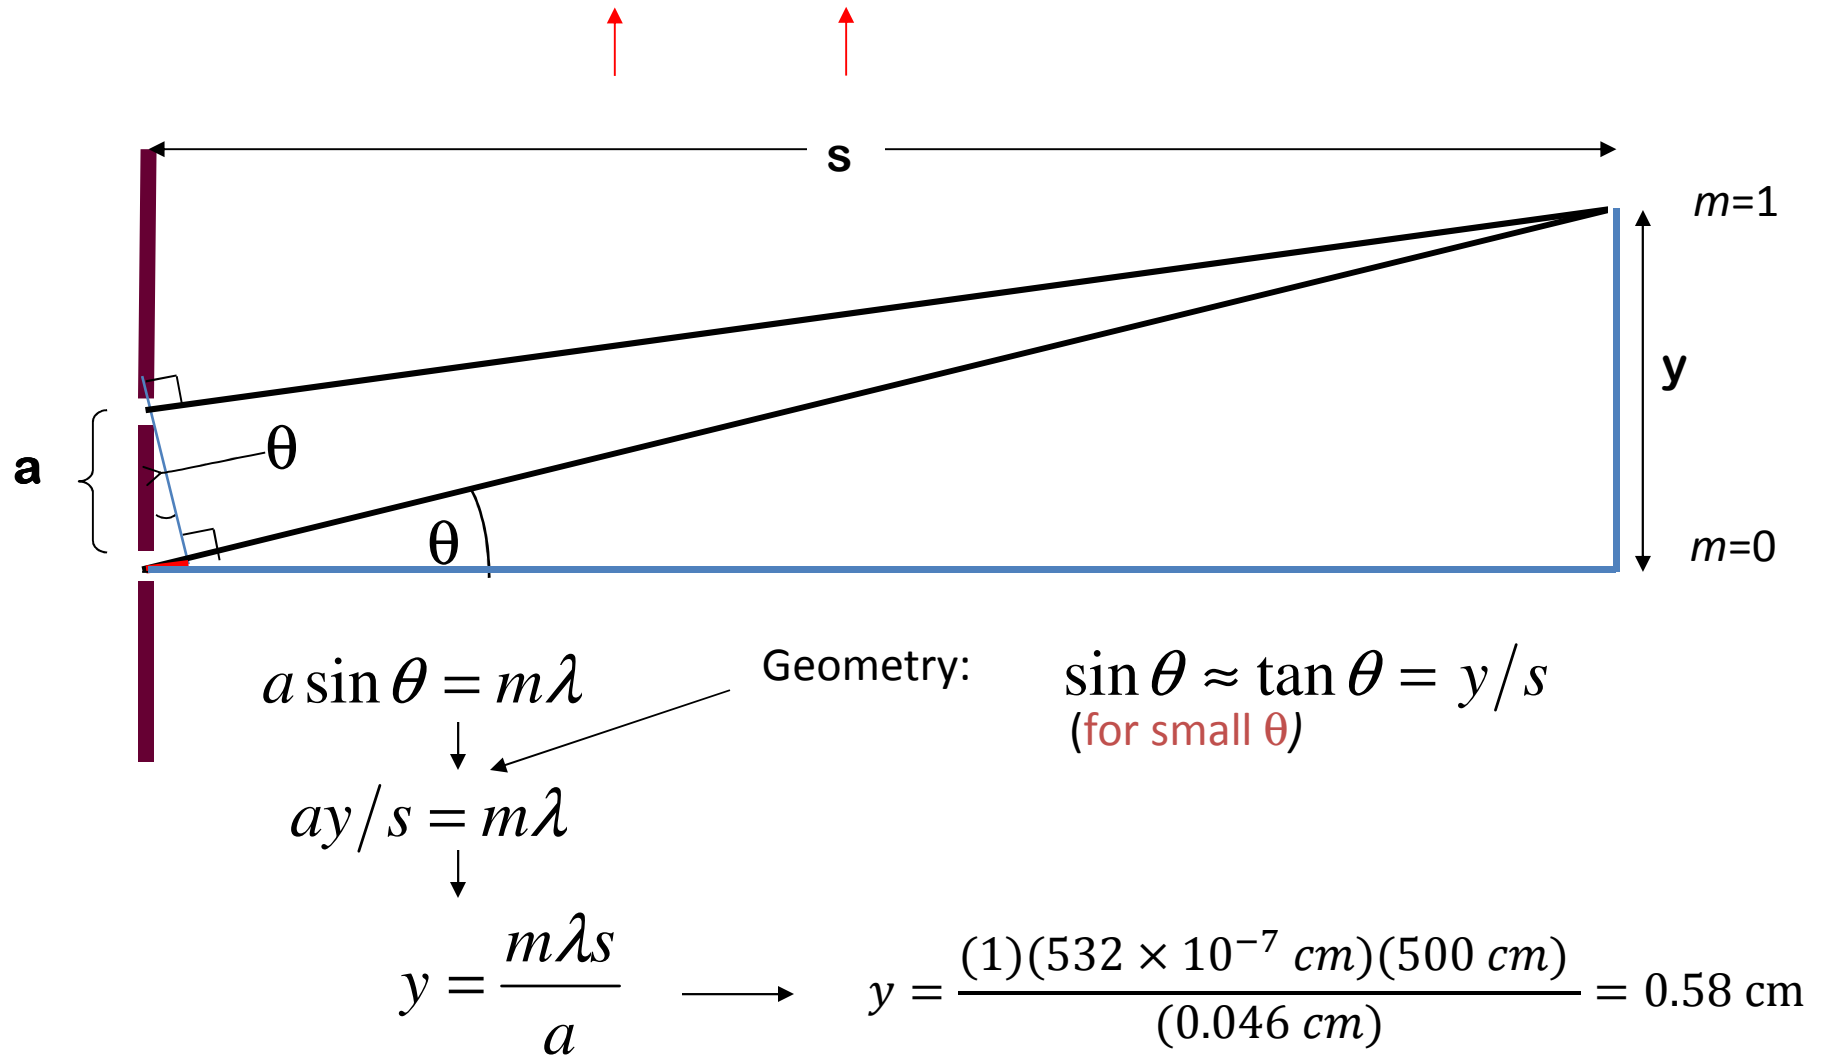

Young's Double Slit Experiment

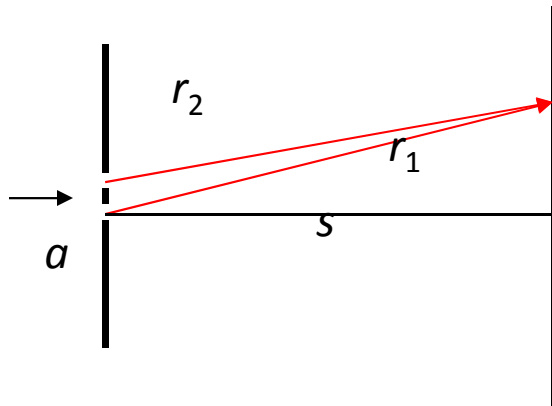



Far from the source, $s \gg a$,

$$I = 4I_0 \cos^2 \frac{\delta}{2}$$


$$= 4I_0 \cos^2 \left(\frac{k(r_1 - r_2)}{2} \right)$$

$$r_1 - r_2 = a \sin \theta \approx a \tan \theta \approx \frac{ay}{s}$$

$$I \approx 4I_0 \cos^2 \frac{kay}{2s} = 4I_0 \cos^2 \frac{\pi ay}{s\lambda}$$

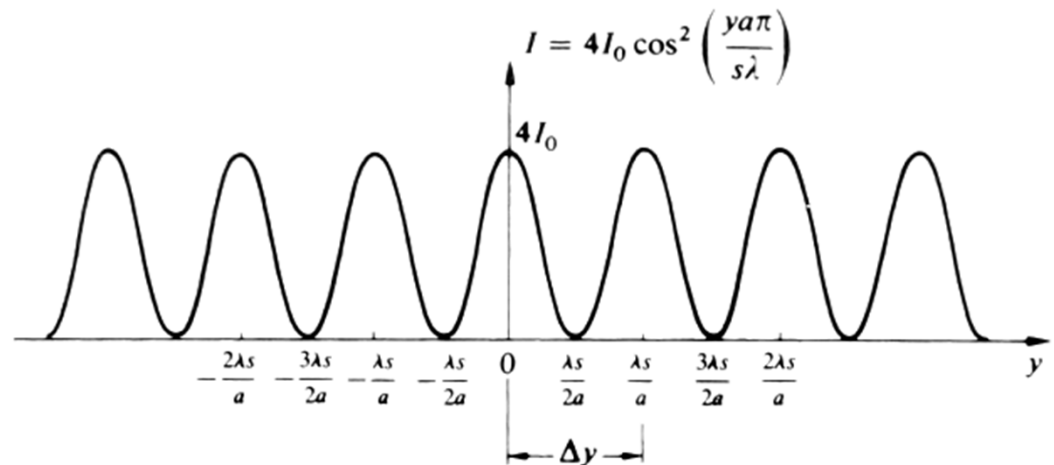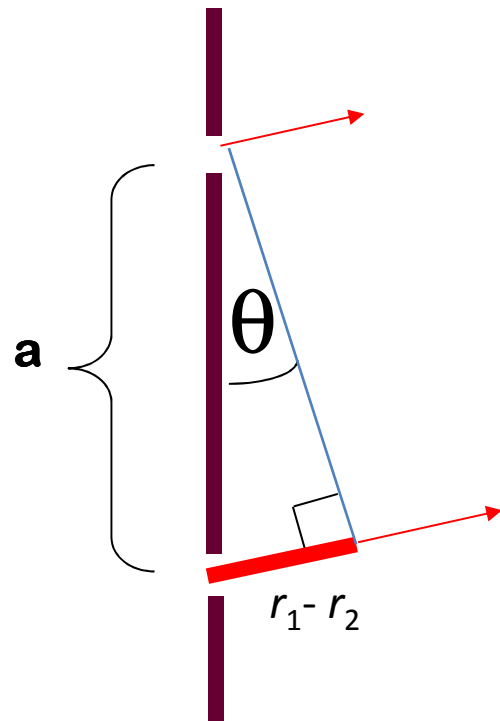


Coherence Length

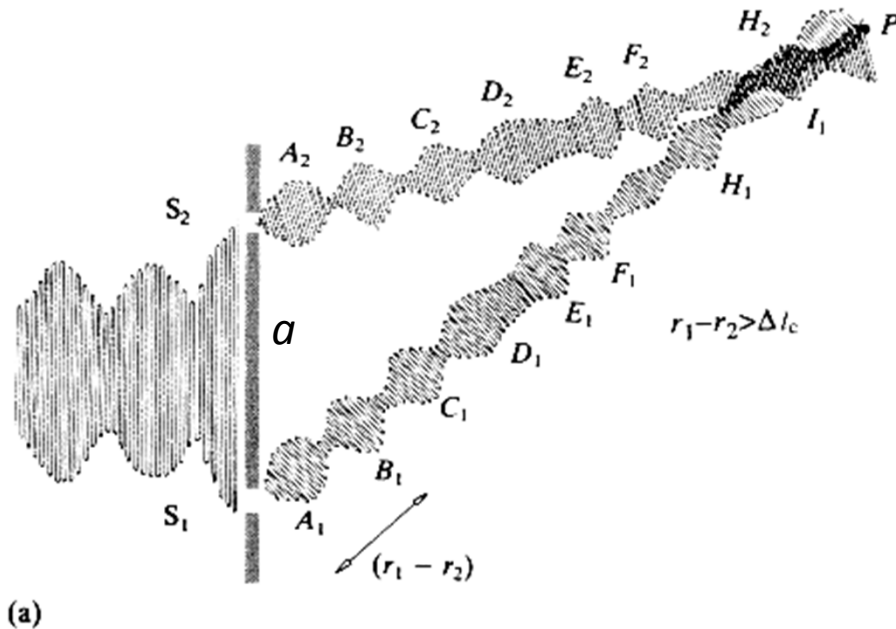

1. Spatial coherence: wave front should be coherent over distance a
2. Spatial coherence:


$$r_1 - r_2 < l_c$$
3. Waves should not be orthogonally polarized

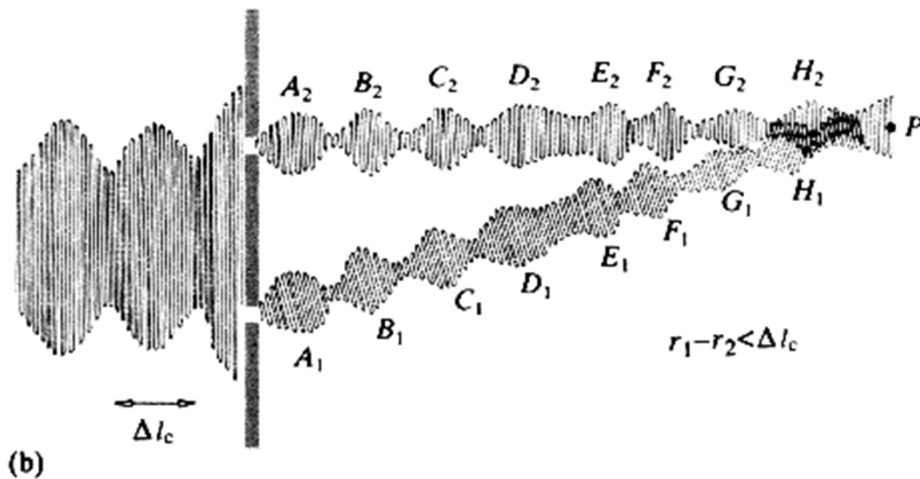


Lasers have very long coherence lengths

White light is coherent only over short distances: $l_c \sim 3\lambda$


Other Interference Experiments: Fresnel's Double Mirror Interferometer

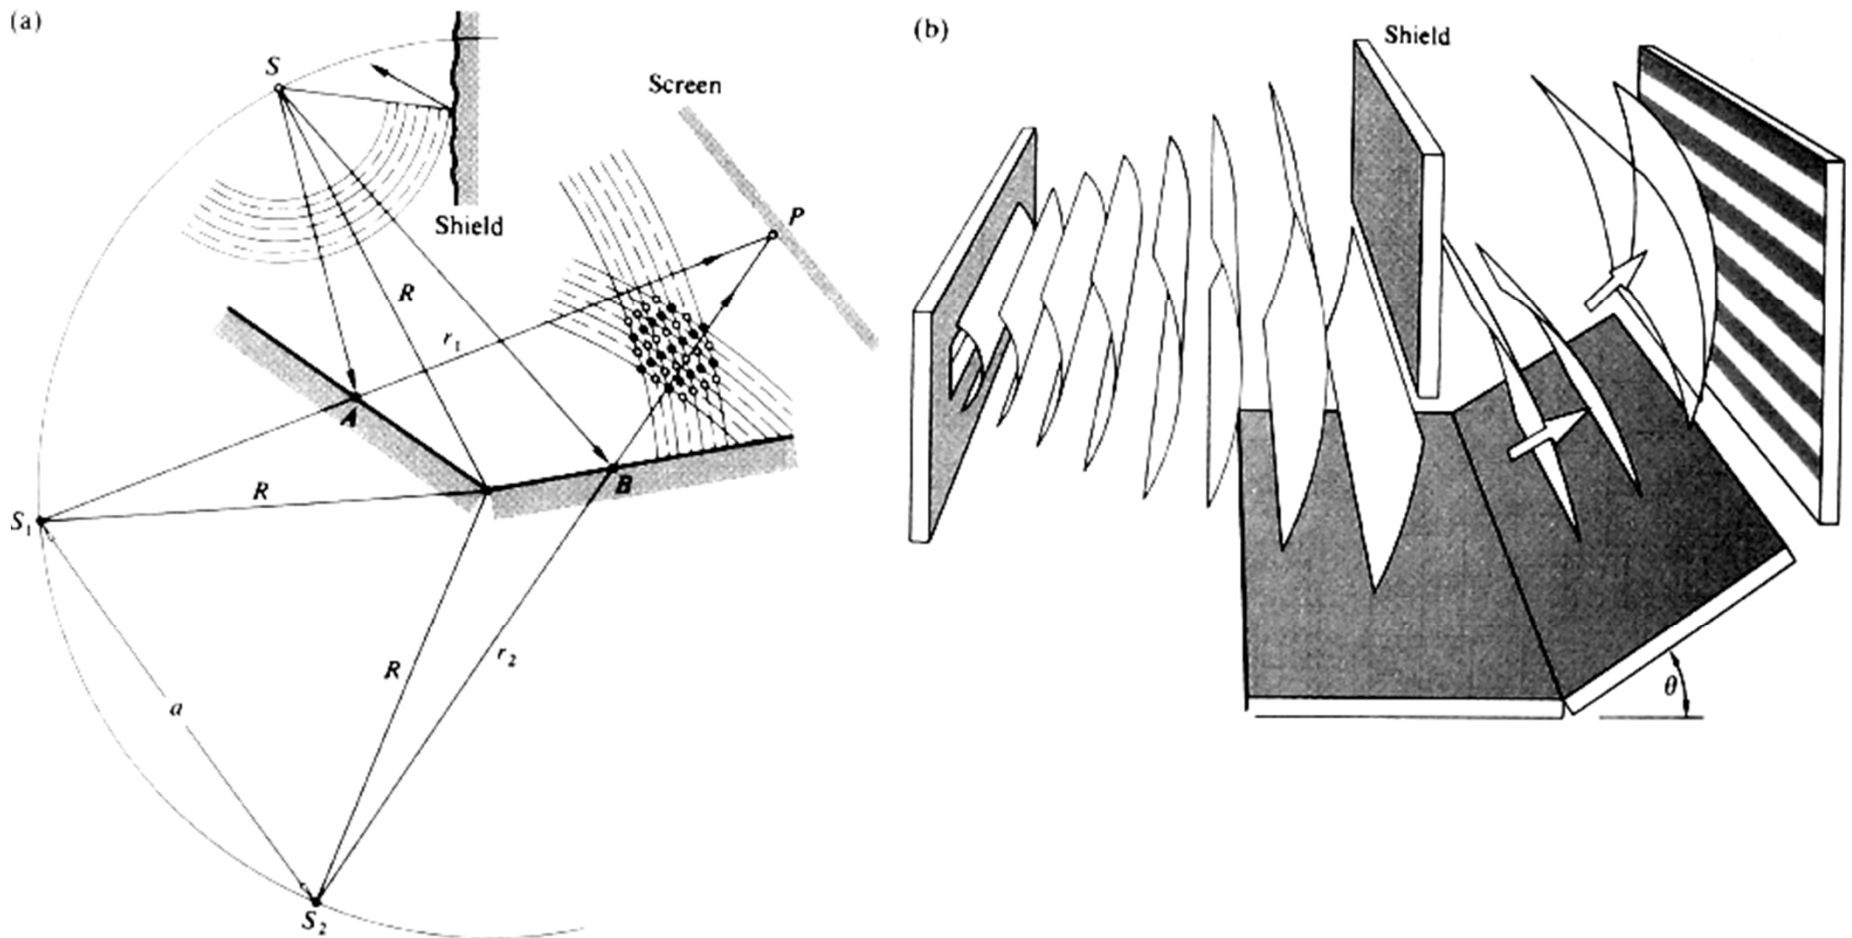

Other Interference Experiments: Lloyd's Mirror Interferometer

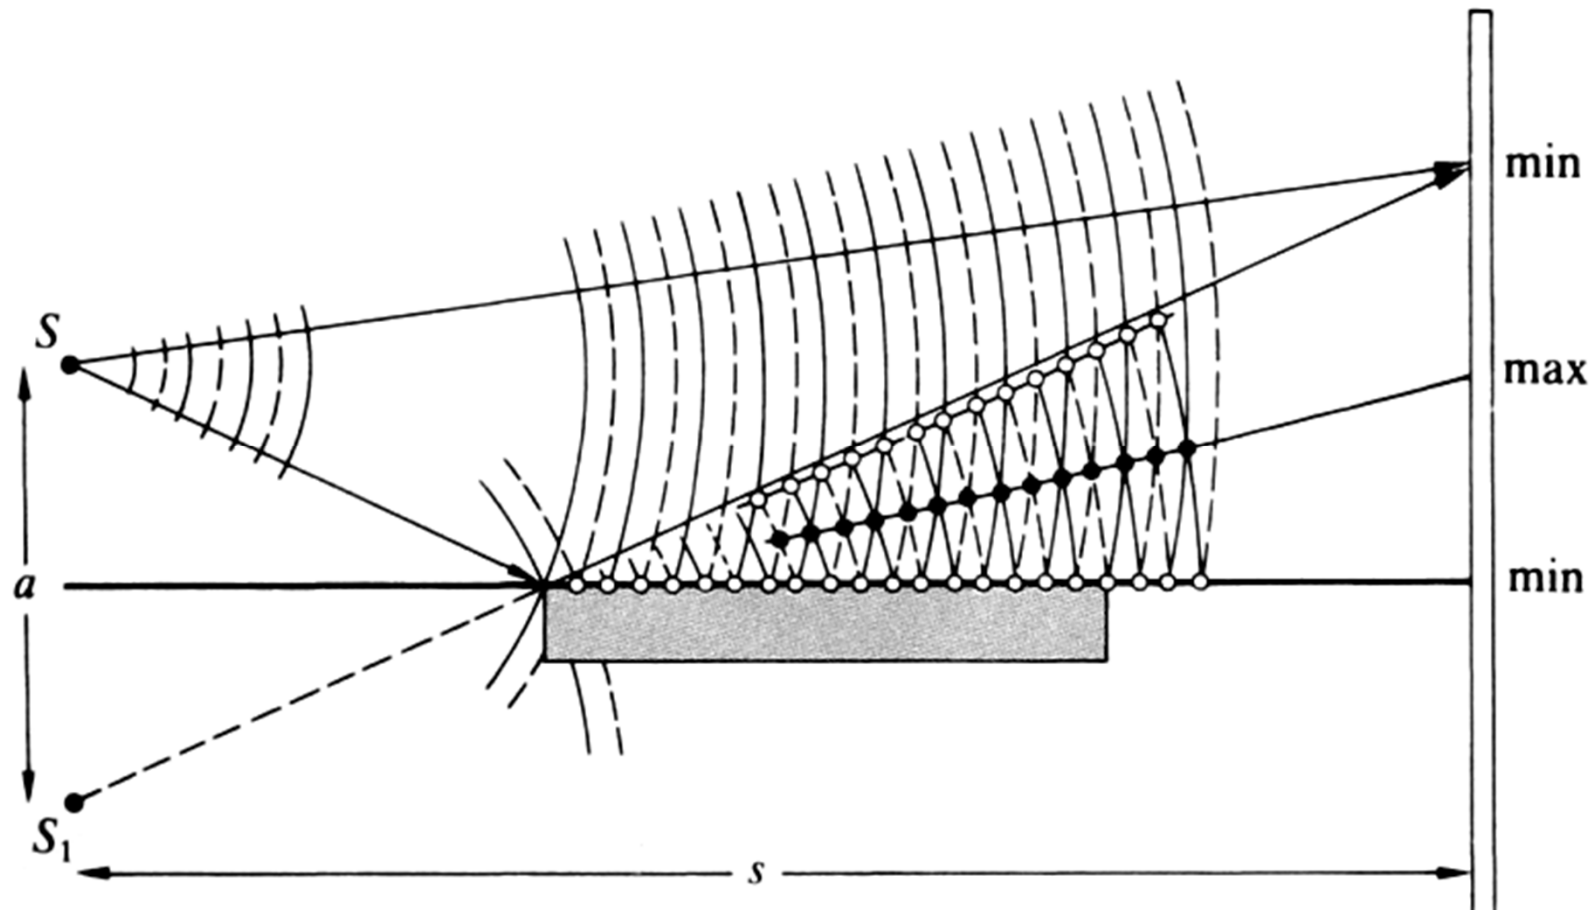


Other Interference Experiments: Fresnel's Double Prism Interferometer

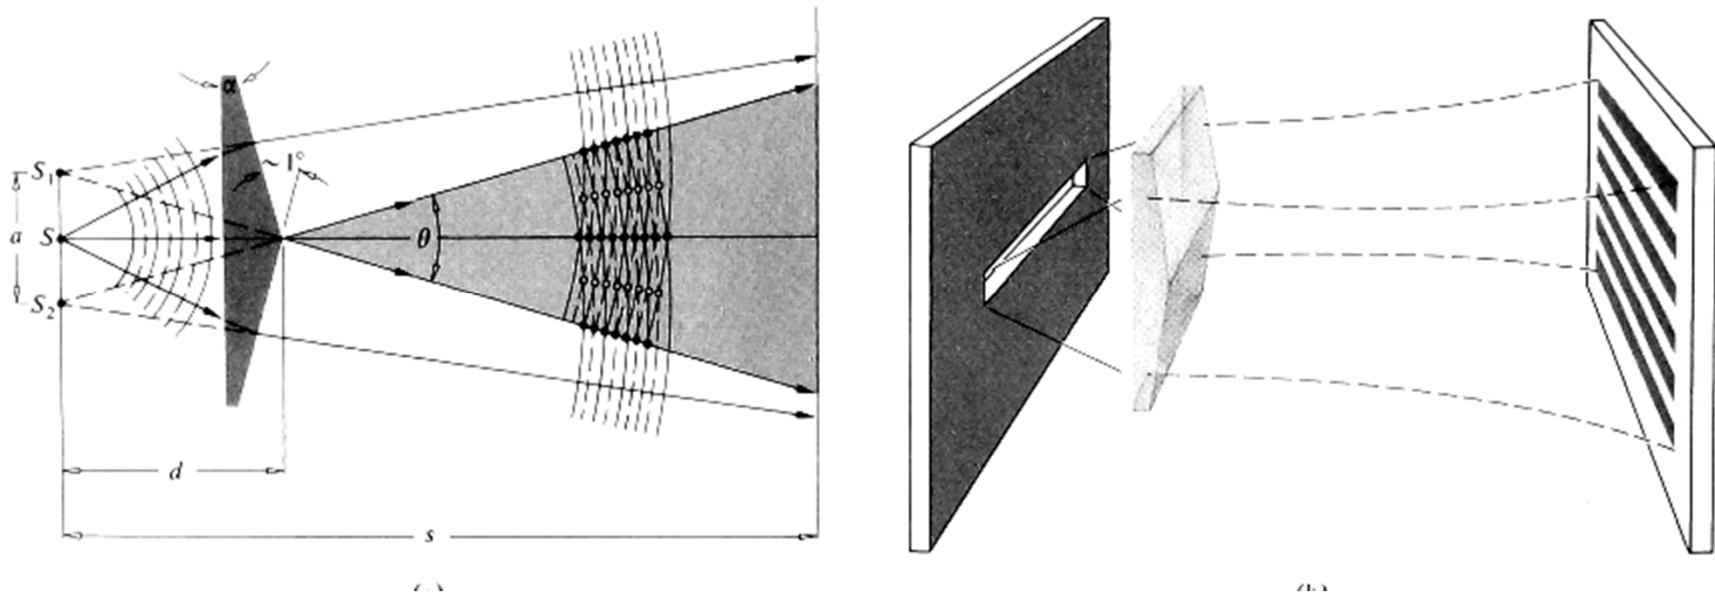

- The general approach with many interference problems is to figure out how a particular system is equivalent to a double-slit experiment.

Fresnel's Double Prism Interferometer

- First, what is the spacing between the two equivalent light sources?
 - Where is the image of the light source?

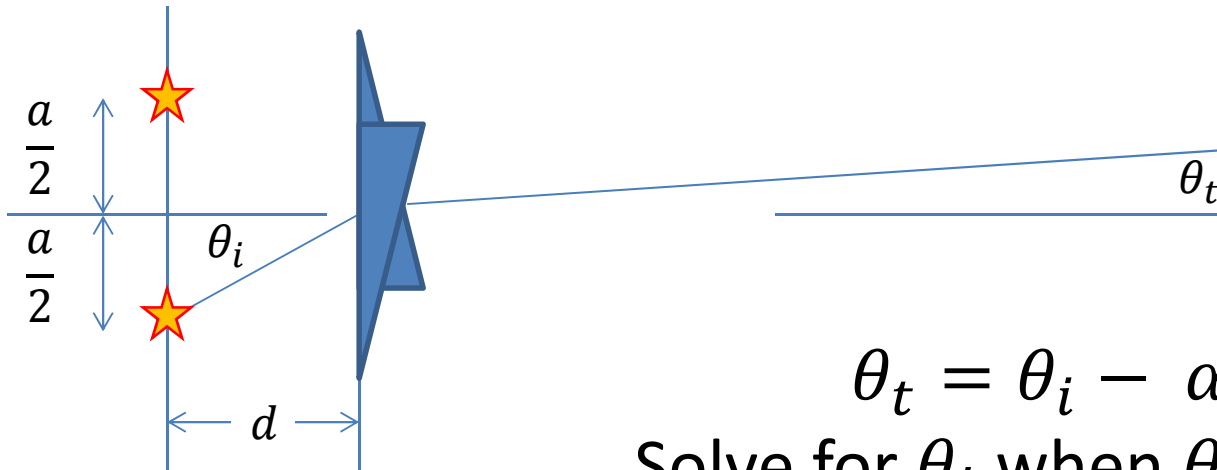


$$\theta_t = \theta_i - \alpha(n - 1)$$

Solve for θ_i when $\theta_t = 0^\circ \dots$

$$\frac{a}{2} = d \theta = d \alpha(n - 1)$$

Young's Double Slit Experiment

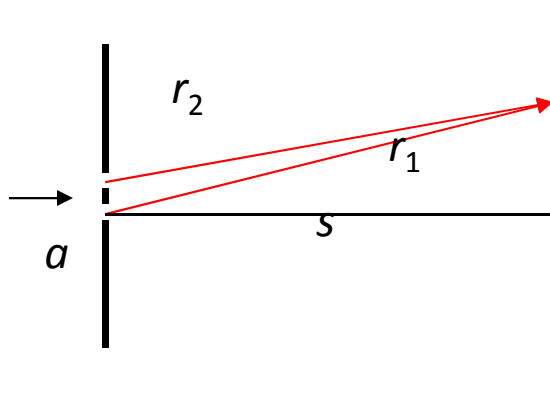



Far from the source, $s \gg a$,

$$I = 4I_0 \cos^2 \frac{\delta}{2}$$

$$= 4I_0 \cos^2 \left(\frac{k(r_1 - r_2)}{2} \right)$$

$$r_1 - r_2 = a \sin \theta \approx a \tan \theta \approx \frac{ay}{s}$$


$$I \approx 4I_0 \cos^2 \frac{kay}{2s} = 4I_0 \cos^2 \frac{\pi ay}{s\lambda}$$

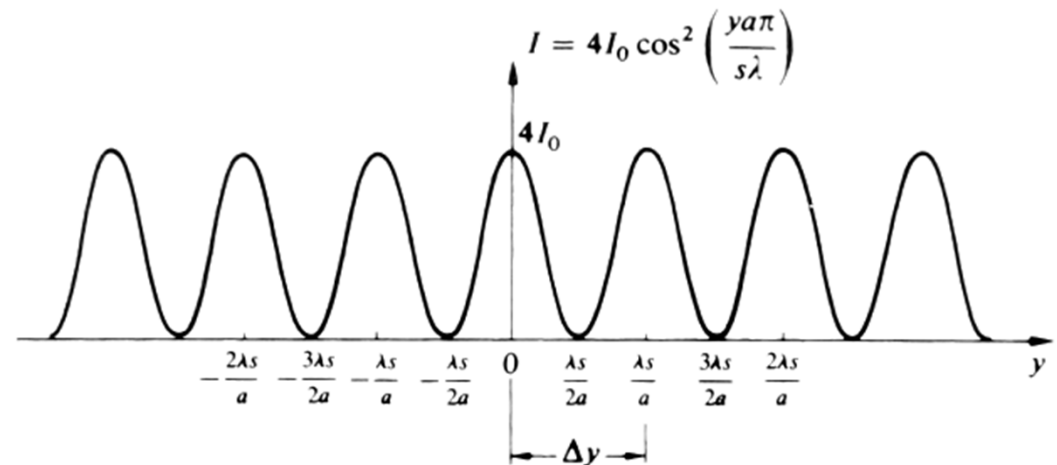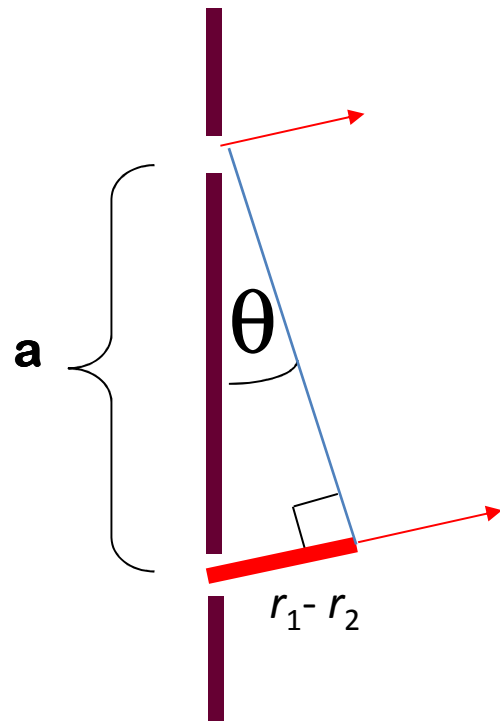

Interference From Thin Films

- Important result:

$$\left(\frac{E_r}{E_i}\right)_{\perp} = \frac{n_1 - n_2}{n_1 + n_2}$$

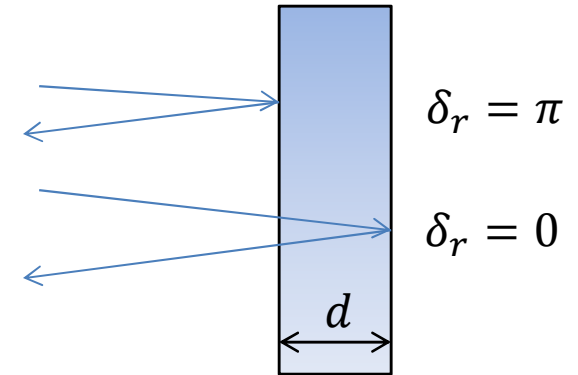

– external reflection introduces a phase shift of π

- Wavelength in a material with index of refraction n :


$$\lambda = \lambda_0/n$$

- Number of wavelengths in thickness $2d$:

$$N = \frac{2dn}{\lambda_0}$$

- Phase difference: $\delta = 2\pi \left(N + \frac{1}{2}\right)$

Interference from Thin Films

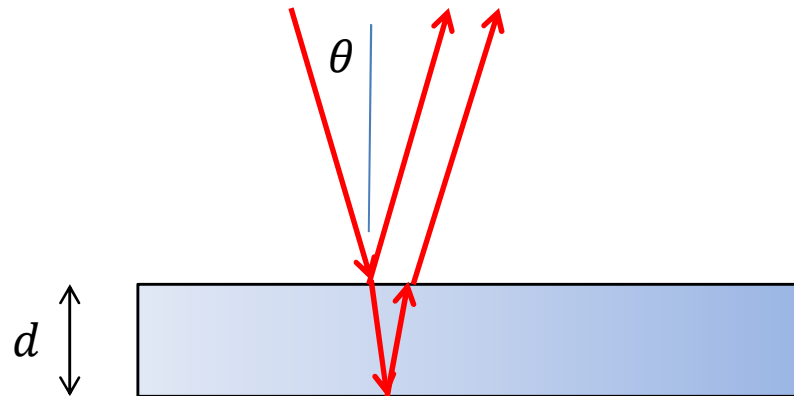

- Phase difference for normal incidence:

$$\delta = 2\pi \left(\frac{2nd}{\lambda_0} + \frac{1}{2} \right)$$

- Phase difference when angle of incidence is θ :

$$\delta = 2\pi \left(\frac{2nd}{\lambda_0 \cos \theta} + \frac{1}{2} \right)$$

- For monochromatic light, bright fringes have $\delta = 2\pi m$ and are located at

$$\cos \theta = \frac{nd}{\pi \lambda_0 \left(m - \frac{1}{2} \right)}$$

Interference from Thin Films




$$\delta = 2\pi \left(\frac{2nd}{\lambda_0 \cos \theta} + \frac{1}{2} \right)$$

$\lambda_0 = 650 \text{ nm}$ (red light)

$d = 0.3 \text{ mm}$

$n = 1.333$

$s = 1 \text{ m}$

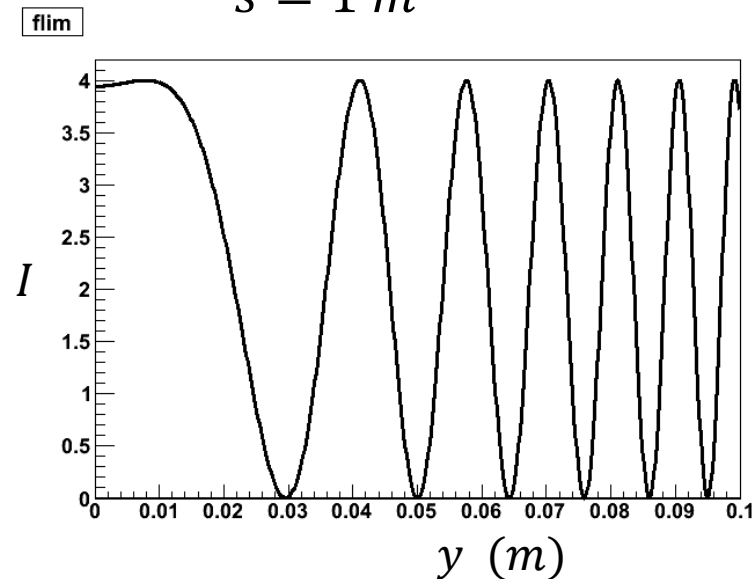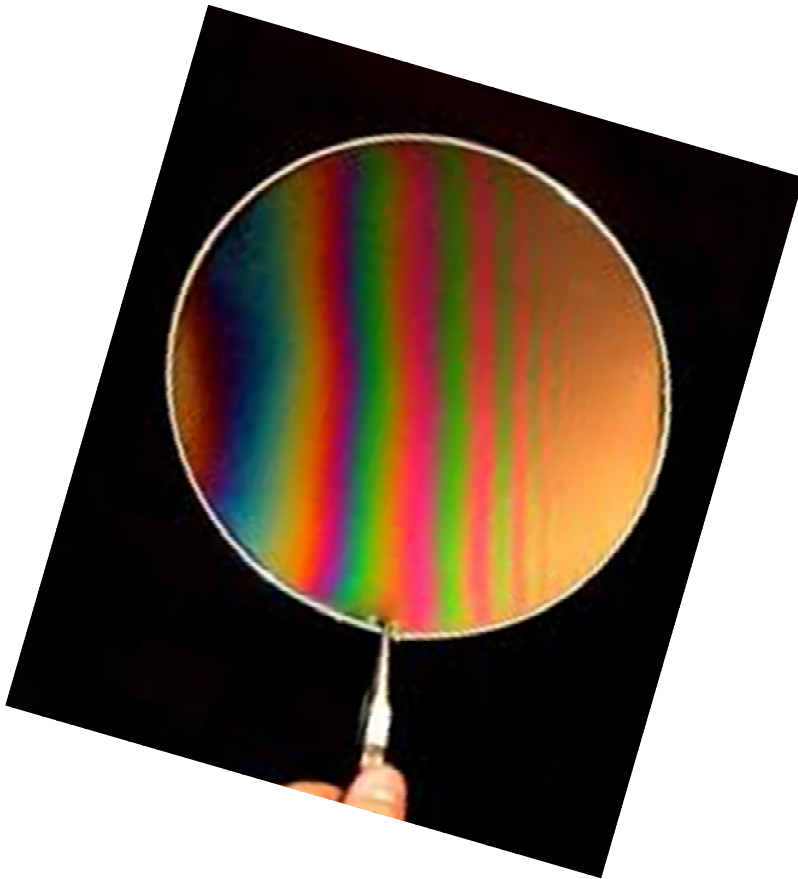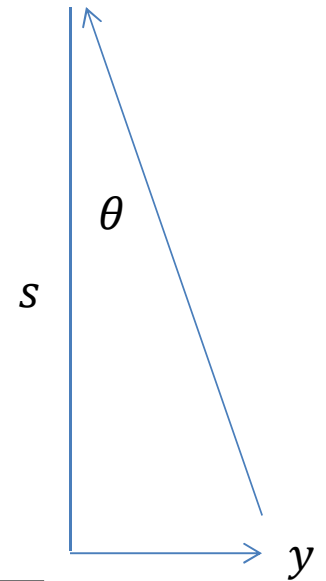

Coating a Glass Lens to Suppress Reflections:


180° phase change at both a and b since reflection is off a more optically dense medium

How thick should the coating be for destructive interference?

$$2t = \lambda'/2$$
$$t = \lambda'/4 = \lambda/4n_2$$

What frequency to use?

Visible light: 400-700 nm

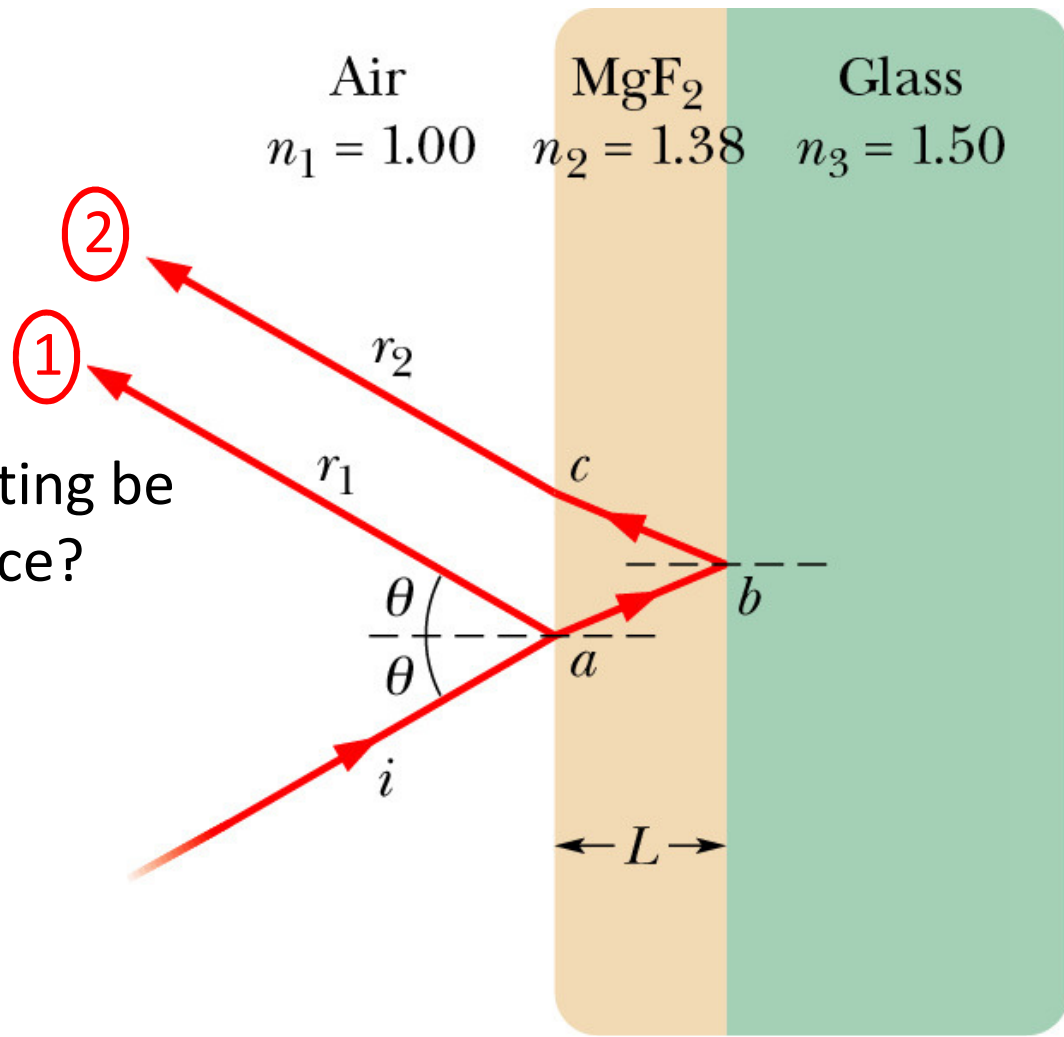



Coating a Glass Lens to Suppress Reflections:

For $\lambda = 550 \text{ nm}$ and least thickness ($m=1$)

$$\begin{aligned} t &= \frac{\lambda}{4n} \\ &= \frac{550 \text{ nm}}{4 \times 1.38} = 99.6 \text{ nm} \end{aligned}$$

- Note that the thickness needs to be different for different wavelengths.
- If the light reflected off the front and back surfaces interferes destructively, then all the energy must be transmitted

Newton's Rings

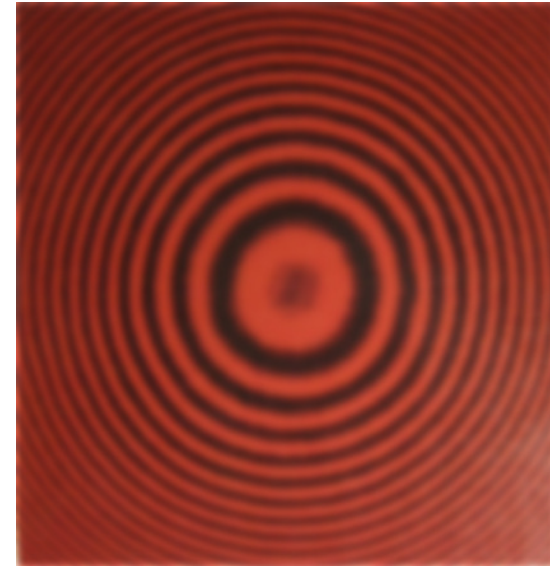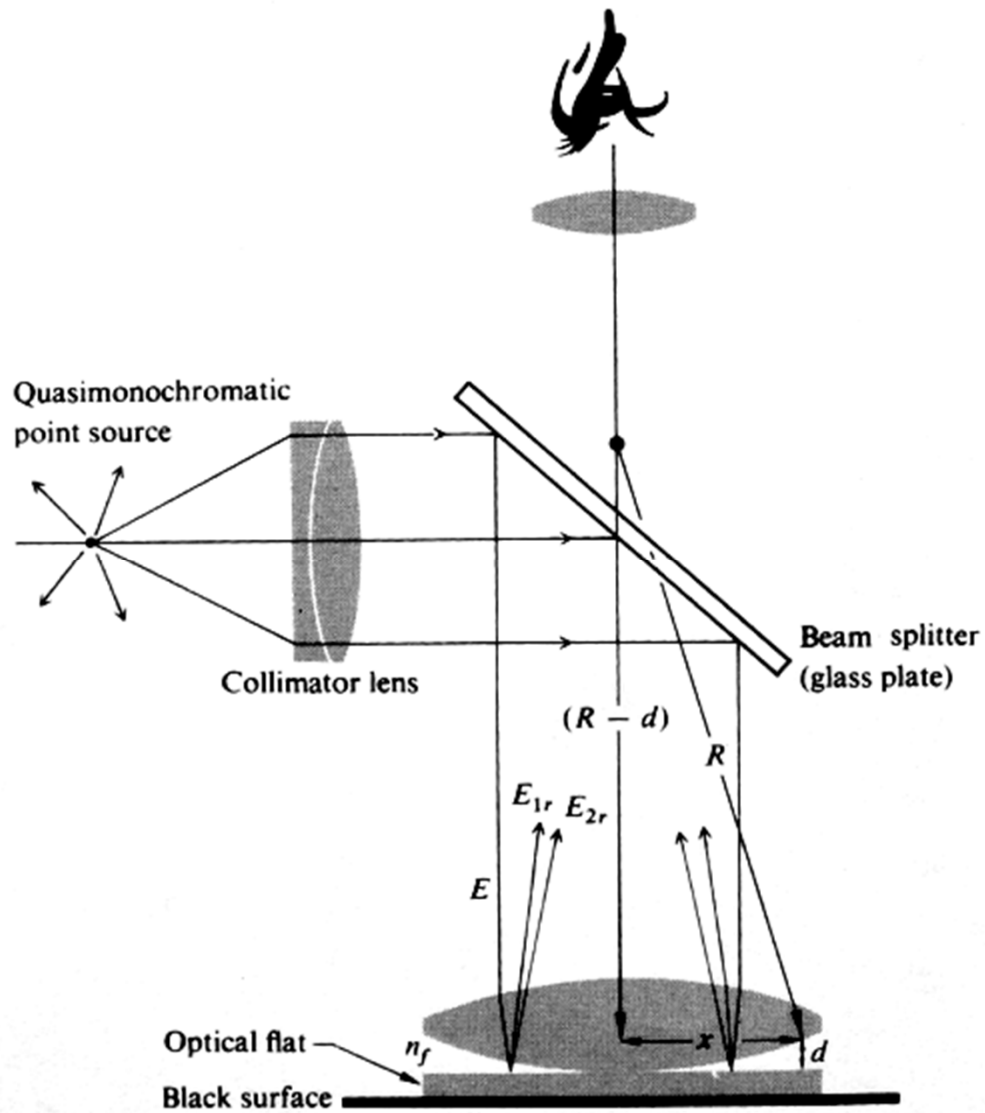

Why is center dark?

$$x^2 + (R - d)^2 = R^2$$

$$\downarrow$$

$$x^2 = 2Rd$$

maxima: $2d = (m + \frac{1}{2})\lambda$

$$x^2 = \left(m + \frac{1}{2}\right) R\lambda$$