


Physics 42200 Waves & Oscillations

Lecture 38 – Interference

Spring 2016 Semester

Single Slit Diffraction



Think of the slit as a number of point sources with equal amplitude. Divide the slit into two pieces and think of the interference between light in the upper half and light in the lower half.


Destructive interference when

$$\frac{b}{2} \sin \theta = \frac{\lambda}{2}$$

Minima when

$$\sin \theta = \lambda/b$$

Single Slit Diffraction



$\sin \theta \approx \tan \theta = y/L$
 Minima located at

$$y = \frac{mL\lambda}{b}, m = 1, 2, 3, \dots$$


In general, the "width" of the image on the screen is not even close to a .

Single Slit Diffraction



Minima located at
 $\sin \theta = \frac{m\lambda}{b}, m = 1, 2, 3, \dots$


Minima only occur
 when $b > \lambda$.

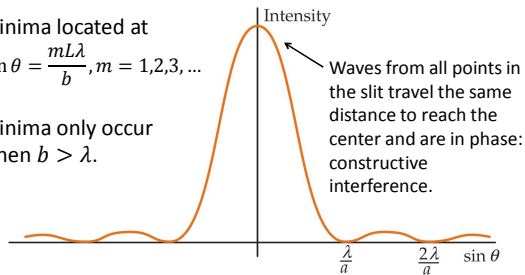

Fresnel and Fraunhofer Diffraction


Assumptions about the wave front that impinges on the slit:

- When it's a plane, the phase varies linearly across the slit: Fraunhofer diffraction
- When the phase of the wave front has significant curvature: Fresnel diffraction




Fresnel and Fraunhofer Diffraction

- Fraunhofer diffraction
 - Far field: $R \gg b^2/\lambda$




– R is the smaller of the distance to the source or to the screen


- Fresnel Diffraction:
 - Near field: wave front is not a plane at the aperture




Single-Slit Fraunhofer Diffraction

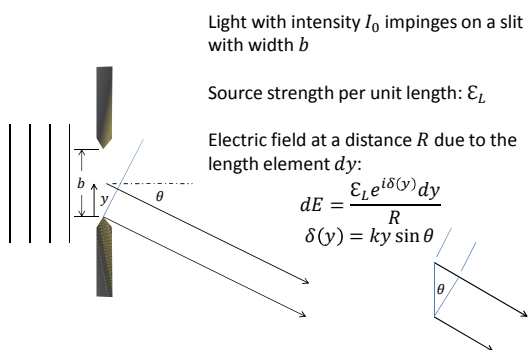


Single-Slit Fraunhofer Diffraction

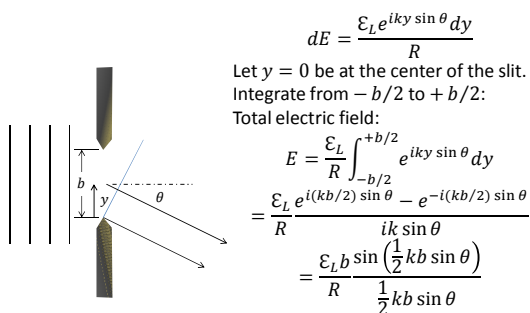

Single-Slit Fraunhofer Diffraction

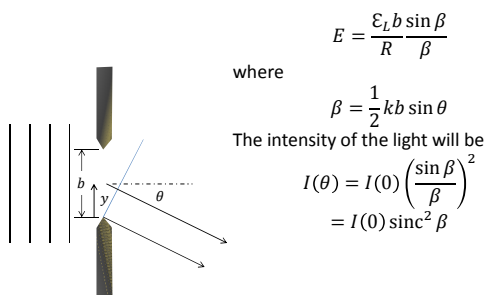

Single-Slit Fraunhofer Diffraction

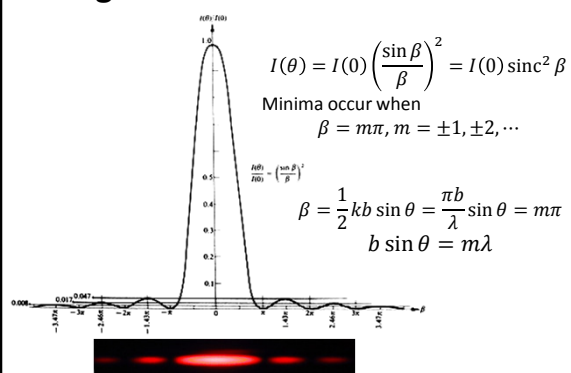

Fourier Transforms

$$E = \frac{\mathcal{E}_L}{R} \int_{-b/2}^{+b/2} e^{iky \sin \theta} dy$$

- Limits of integration can be expressed using

$$U(y) = \begin{cases} 1 & \text{when } |y| < b/2 \\ 0 & \text{otherwise} \end{cases}$$

- Then, the transmitted field is:


$$E = \frac{\mathcal{E}_L}{R} \int_{-\infty}^{+\infty} U(y) e^{ik'y} dy$$

$$k' = k \sin \theta$$


- You might recognize that this is just the Fourier transform of $U(y)$...

Single slit: Fraunhofer diffraction

Adding dimension: long narrow slit
Diffraction most prominent in the narrow direction.




Emerging light has cylindrical symmetry



Rectangular Aperture Fraunhofer Diffraction



Source strength per unit area: \mathcal{E}_A

$$dE \approx \frac{\mathcal{E}_A e^{ikyY/R} e^{ikzZ/R} dydz}{R}$$
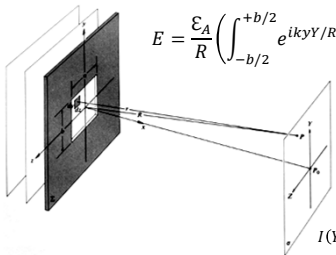
$$E = \frac{\mathcal{E}_A}{R} \left(\int_{-b/2}^{+b/2} e^{ikyY/R} dy \right) \left(\int_{-a/2}^{+a/2} e^{ikzZ/R} dz \right)$$


$$I(Y, Z) = I(0) \left(\frac{\sin \beta'}{\beta'} \right)^2 \left(\frac{\sin \alpha'}{\alpha'} \right)^2$$

Rectangular Aperture

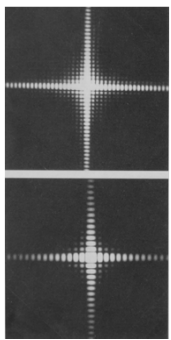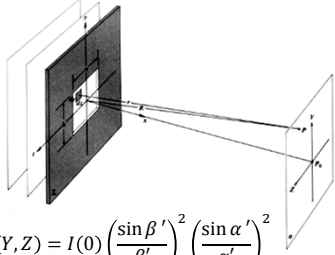
$$I(Y, Z) = I(0) \left(\frac{\sin \beta'}{\beta'} \right)^2 \left(\frac{\sin \alpha'}{\alpha'} \right)^2$$

$$\beta' = \frac{1}{2} kbY/R$$

$$\alpha' = \frac{1}{2} kaZ/R$$

Double-Slit Fraunhofer Diffraction

(a)




- Same idea, but this time we integrate over two slits:

$$E = \frac{\mathcal{E}_L}{R} \int_{-b/2}^{+b/2} e^{iky \sin \theta} dy + \frac{\mathcal{E}_L}{R} \int_{a-b/2}^{a+b/2} e^{iky \sin \theta} dy$$

$$= \frac{\mathcal{E}_L b \sin \beta}{R \beta} (1 + e^{ika \sin \theta})$$

Double-Slit Fraunhofer Diffraction



$$E = \frac{\mathcal{E}_L b \sin \beta}{R \beta} (1 + e^{ika \sin \theta})$$

Light intensity:

$$I(\theta) = 2I(0) \left(\frac{\sin \beta}{\beta} \right)^2 (1 + \cos(ka \sin \theta))$$

$$= 4I(0) \left(\frac{\sin \beta}{\beta} \right)^2 \cos^2 \alpha$$

Where

$$\alpha = \frac{1}{2} ka \sin \theta$$



Since $a > b$, $\cos \alpha$ oscillates more rapidly than $\sin \beta$

Double Slit: Fraunhofer Diffraction

$$I(\theta) = 4I_0 \left(\frac{\sin \beta}{\beta} \right)^2 \cos^2 \alpha$$

$$\beta \equiv (kb/2) \sin \theta$$

$$\alpha \equiv (ka/2) \sin \theta$$



Minima: $\alpha = \pm\pi/2, \pm3\pi/2$

$$a \sin \theta = (m + 1/2) \lambda$$

or: $\beta = m\pi$, where $m = \pm 1, \pm 2, \dots$

$$b \sin \theta = m \lambda$$

$m = 0, \pm 1, \pm 2, \dots$

Three-Slit Fraunhofer Diffraction

$$E = \frac{\mathcal{E}_L b \sin \beta}{R \beta} \frac{e^{3i\delta} - 1}{e^{i\delta} - 1}$$

$$= \frac{\mathcal{E}_L b \sin \beta}{R \beta} \frac{e^{3i\delta/2} e^{3i\delta/2} - e^{-3i\delta/2}}{e^{i\delta/2} e^{i\delta/2} - e^{-i\delta/2}}$$

$$= \frac{\mathcal{E}_L b \sin \beta}{R \beta} e^{i\delta} \frac{\sin 3\delta/2}{\sin \delta/2}$$


$$= \frac{\mathcal{E}_L b \sin \beta}{R \beta} e^{ika \sin \theta} \frac{\sin(\frac{3}{2} ka \sin \theta)}{\sin(\frac{1}{2} ka \sin \theta)}$$

$$= \frac{\mathcal{E}_L b \sin \beta}{R \beta} e^{2i\alpha} \frac{\sin 3\alpha}{\sin \alpha}$$

Light intensity: $I(\theta) = I(0) \left(\frac{\sin \beta}{\beta} \right)^2 \left(\frac{\sin 3\alpha}{\sin \alpha} \right)^2$

Three-Slit Fraunhofer Diffraction


- Light intensity: $I(\theta) = I(0) \left(\frac{\sin \beta}{\beta} \right)^2 \left(\frac{\sin 3\alpha}{\alpha} \right)^2$



- In general, when there are N slits:

$$I(\theta) = I(0) \left(\frac{\sin \beta}{\beta} \right)^2 \left(\frac{\sin N\alpha}{\alpha} \right)^2$$

Maxima occur when $\alpha = \frac{1}{2} k a \sin \theta = m\pi$
 $a \sin \theta = m\lambda$

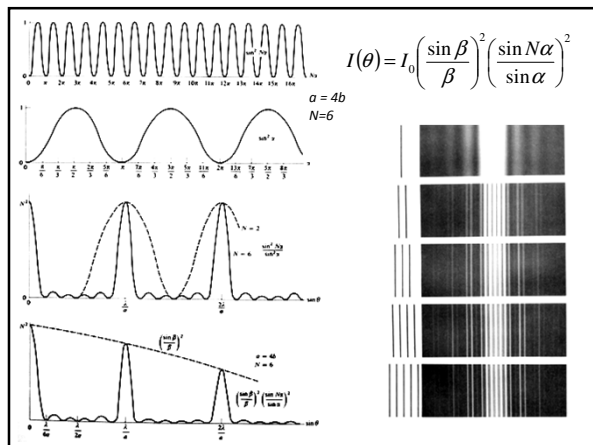

Diffraction Grating

Usually gratings have thousands of slits and are characterized by the number of slits per cm (for example: 6000 cm^{-1})

Half-width of maximum:
 $\Delta\theta \sim 1/N$



Normal incidence, maxima at:

$$a \sin \theta_m = m\lambda$$

* screen
 VERY far
 away




David Rittenhouse
 1732 - 1796

Transmission amplitude grating

Introduced by Rittenhouse in ~1785


Transmission Phase Grating

General case:
Incidence angle $\theta_i \neq 0$



$AB - CD = a \sin \theta_m - a \sin \theta_i$


Maxima: for arbitrary incidence angle

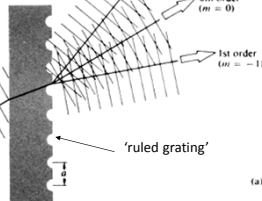


(a)

Reflection Phase Grating

Examples: CD disk
Finely machined surfaces

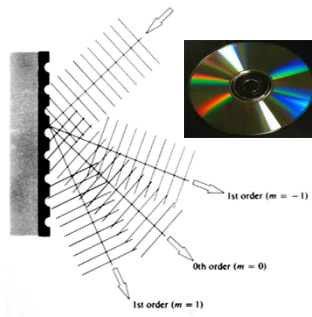


1st order ($m = -1$)
0th order ($m = 0$)
1st order ($m = 1$)

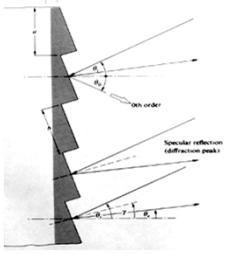



0th order
1st order
Spectral reflection (diffraction peaks)


Diffraction Grating Spectrometers

- Angle of maximum intensity depends on wavelength:
$$\sin \theta = \frac{m\lambda}{a}$$
- Diffraction gratings are used to separate and analyze the spectrum of light:

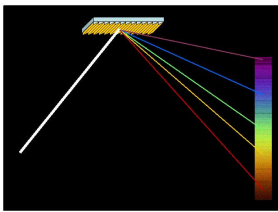

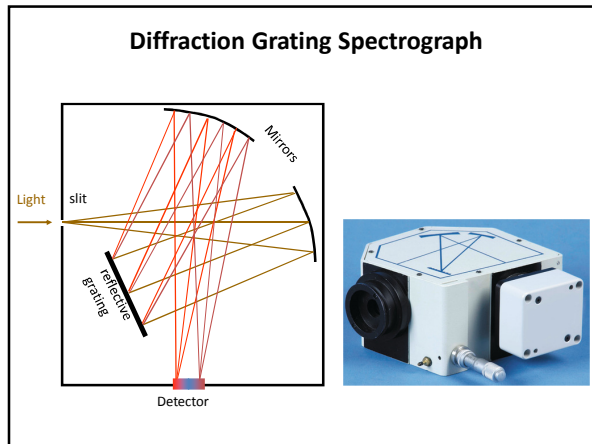

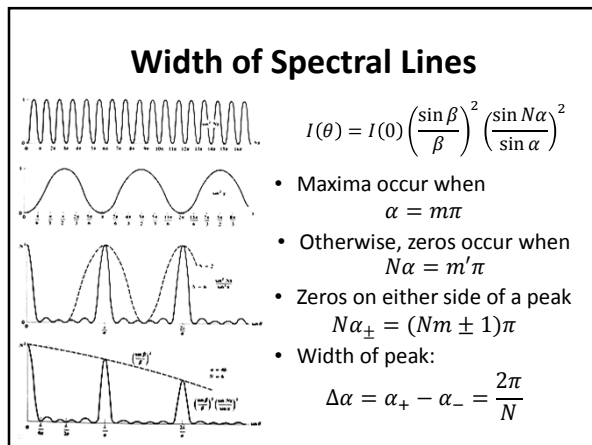

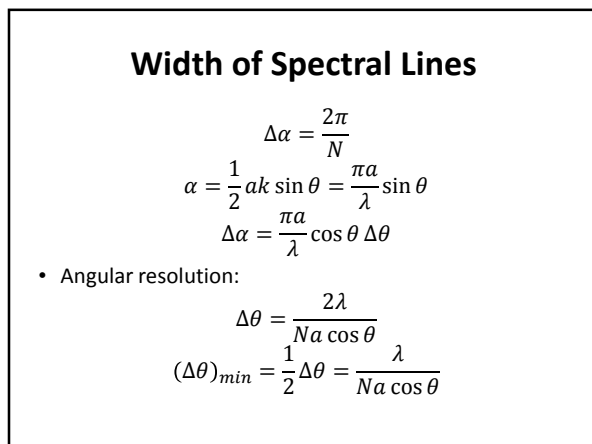

Angular Dispersion

- The angle depends on the wavelength:

$$a \sin \theta = m\lambda$$

$$a \cos \theta \Delta \theta = m \Delta \lambda$$

$$\frac{d\theta}{d\lambda} = \frac{m}{a \cos \theta}$$

- Chromatic resolving power is defined:

$$\mathcal{R} \equiv \frac{\lambda}{(\Delta\lambda)_{\min}}$$

$$(\Delta\lambda)_{\min} = \frac{a \cos \theta}{m} (\Delta\theta)_{\min} = \frac{a \cos \theta}{m} \frac{2\lambda}{Na \cos \theta} = \frac{\lambda}{Nm}$$

$$\mathcal{R} = Nm = \frac{Na \sin \theta}{\lambda}$$

Resolving Power

- The chromatic resolving power is proportional to Na
- Example: 6000 lines per cm, 15 cm width

$$N = (6000 \text{ lines/cm}) \times (15 \text{ cm}) = 90,000$$

$$a = 1/(6000 \text{ lines/cm}) = 1.667 \mu\text{m}$$

$$\lambda = 588.991 \text{ nm}$$

$$\lambda' = 589.595 \text{ nm}$$

$$m = 2 \text{ (second order)}$$

$$\sin \theta = \frac{m\lambda}{a} =$$

$$2 \times (589 \times 10^{-7} \text{ cm}) \times (6000 \text{ lines/cm})$$

$$= 0.707$$

$$\mathcal{R} = mN = 2 \times 90,000 = 180,000$$

$$(\Delta\lambda)_{\min} = \frac{\lambda}{\mathcal{R}} = \frac{(589 \text{ nm})}{180,000} = 0.00327 \text{ nm}$$

Overlapping Orders


- Confusion can arise when a spectral line at one order overlaps with a different spectral line at a different order:

$$\sin \theta = \frac{(m+1)\lambda}{a} = \frac{m\lambda'}{a} = \frac{m(\lambda + \Delta\lambda)}{a}$$

$$\Delta\lambda = \frac{\lambda}{m} \equiv (\Delta\lambda)_{\text{free}} \text{ (free spectral range)}$$


X-ray Diffraction

- With short enough wavelengths, the atoms in a crystal lattice form the diffraction grating:

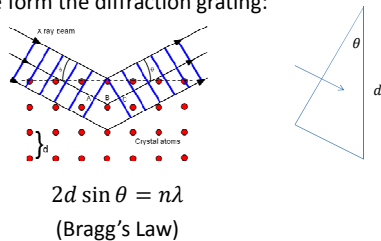


X-ray Diffraction

- Regular crystal lattices have many "planes":




X-ray Diffraction


- Max von Laue exposed crystals to a continuous x-ray spectrum:

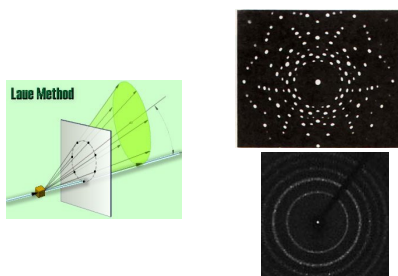

X-ray Diffraction



X-ray
diffraction
pattern from
B form of
DNA



θ - tilt of helix (angle from perpendicular to long axis)
 h - 3.4 Å (Distance between bases)
 p - 34 Å (Distance for one complete turn of helix;
 Repeat unit of the helix)

