

Physics 42200
Waves & Oscillations

Lecture 39 – Fresnel Diffraction

Spring 2016 Semester


Announcement

Final Exam
 Tuesday, May 3rd
 7:00 – 9:00 pm
 Room PHYS 112

*You can bring one sheet of notes, formulas,
 examples, etc...*

Also... **no lecture on Friday.**
 Next week will be some review.

Fraunhofer Diffraction




Fraunhofer diffraction:

- The phase varies linearly across the aperture
- The intensity of light arriving from each part of the aperture is equal

$$dE = \frac{\epsilon_L e^{iky \sin \theta} dy}{R}$$

Fraunhofer Diffraction



Fraunhofer diffraction:


- The phase varies linearly across the aperture
- The intensity of light arriving from each part of the aperture is equal

$$dE = \frac{\mathcal{E}_L e^{iky(\sin\theta - \sin\theta_i)} dy}{R}$$

Huygens-Fresnel Principle

- Each point on a wave front is a source of spherical waves that are in phase with the incident wave.
- The light at any point in the direction of propagation is the sum of all such spherical waves, taking into account their relative phases and path lengths.
- *The secondary spherical waves are preferentially emitted in the forward direction.*
- Fresnel presented a very different way of thinking about the propagation and diffraction of light.
 - The details might be the subject of extensive debate
 - It relies completely on the wave nature of light
 - The predictions were confirmed by experiment

Huygens-Fresnel Principle

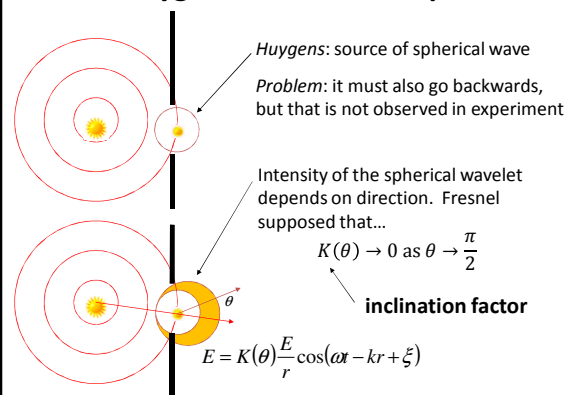

Huygens-Fresnel Principle

Huygens: source of spherical wave

Problem: it must also go backwards, but that is not observed in experiment

Intensity of the spherical wavelet depends on direction...

$$K(\theta) = \frac{1}{2}(1 + \cos \theta)$$

inclination factor

$$E = K(\theta) \frac{E}{r} \cos(\omega t - kr + \xi)$$

Propagation of Spherical Waves

- Consider a spherical wave emitted from a source S at time $t = 0$.

$$E(\rho, t') = \frac{\mathcal{E}_0}{\rho} \cos(\omega t' - k\rho)$$


- These spherical waves expand outward from S

Propagation of Spherical Waves


- Consider a series of concentric spheres around another point P with radii $r_0, r_0 + \lambda/2, r_0 + \lambda, \dots$

Propagation of Spherical Waves

- Consider a series of concentric spheres around another point P with radii $r_0, r_0 + \lambda/2, r_0 + \lambda, \dots$

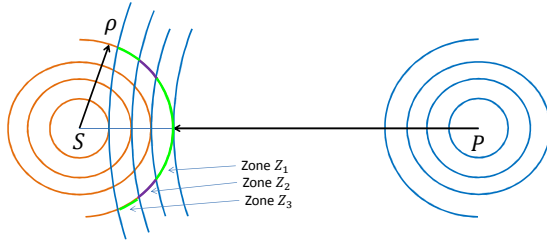

Fresnel Zones

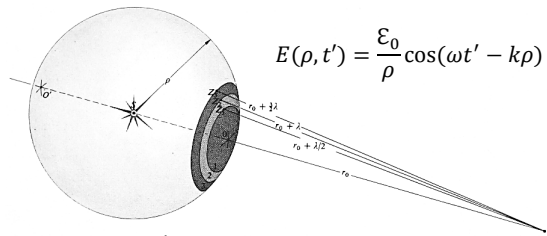

- Source strength per unit area in any zone is


$$\epsilon_A \propto \frac{\epsilon_0}{\rho}$$

- Curvature of the surface in each zone is small

Fresnel Zones


Electric field at point P due to secondary waves in zone ℓ :

$$dE = K_\ell(\theta) \frac{\varepsilon_A}{r} \cos(\omega t - k(\rho + r)) dS$$

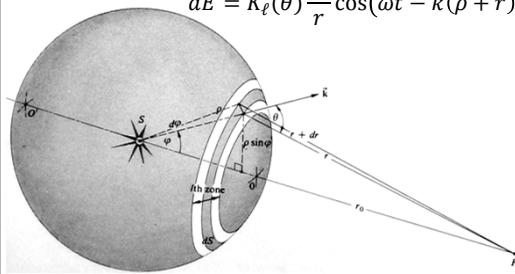

Fresnel Zones

- How can we describe the element of area dS ?

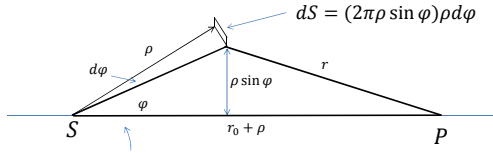


Law of cosines: $r^2 = \rho^2 + (r_0 + \rho)^2 - 2\rho(r_0 + \rho) \cos \varphi$
 $2rdr = 2\rho(r_0 + \rho) \sin \varphi d\varphi$
 $\rho \sin \varphi d\varphi = \frac{rdr}{r_0 + \rho}$

Fresnel Zones

Electric field at point P due to secondary waves in zone ℓ :

$$dE = K_\ell(\theta) \frac{\mathcal{E}_A}{r} \cos(\omega t - k(\rho + r)) dS$$

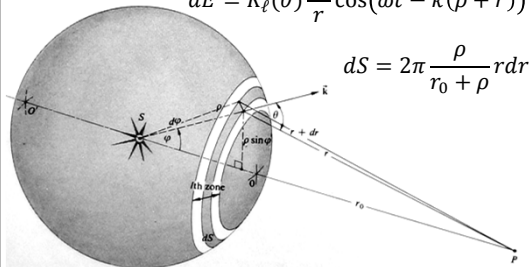

$$dS = 2\pi \frac{\rho}{r_0 + \rho} r dr$$

Fresnel Zones

- Total electric field due to wavelets emitted in zone ℓ :

$$E_\ell = 2\pi K_\ell(\theta) \frac{\mathcal{E}_A \rho}{\rho + r_0} \int_{r_{\ell-1}}^{r_\ell} \cos(\omega t - k(\rho + r)) dr$$

$$= -\frac{2\pi}{k} K_\ell(\theta) \frac{\mathcal{E}_A \rho}{\rho + r_0} [\sin(\omega t - k(\rho + r))]_{r_{\ell-1}}^{r_\ell}$$

- But $r_\ell = r_0 + \ell\lambda/2$ and $r_{\ell-1} = r_0 + (\ell - 1)\lambda/2$ and $k\ell\lambda/2 = \ell\pi$, so

$$E_\ell = (-1)^{\ell+1} K_\ell(\theta) \frac{\mathcal{E}_A \rho \lambda}{\rho + r_0} \sin(\omega t - k(\rho + r_0))$$

- Even ℓ : $E_\ell < 0$, odd ℓ : $E_\ell > 0$

Fresnel Zones

- The total electric field at point P is the sum of all electric fields from each zone:

$$E = E_1 + E_2 + E_3 + \dots + E_m$$

$$= |E_1| - |E_2| + |E_3| - |E_4| + \dots \pm |E_m|$$

- Most of the adjacent zones cancel:


$$E = \frac{|E_1|}{2} + \left(\frac{|E_1|}{2} - |E_2| + \frac{|E_3|}{2} \right) + \dots \pm \frac{|E_m|}{2}$$

- Two possibilities:

$$E \approx \frac{|E_1|}{2} + \frac{|E_m|}{2} \quad \text{or} \quad E \approx \frac{|E_1|}{2} - \frac{|E_m|}{2}$$

- Fresnel conjectured that $|E_m| \rightarrow 0$ so $E \approx |E_1|/2$


Circular Aperture: Fresnel Diffraction

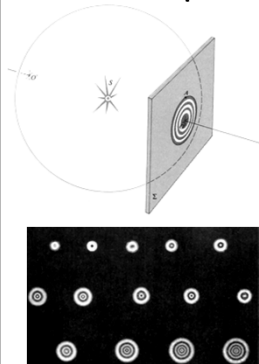

- Suppose a circular aperture uncovers only the first m zones.
- If m is even, then the first two zones interfere destructively: $E = 0$
- If m is odd, then all but the first one cancel each other: $E = |E_1|$
- What about points off the central axis?


Circular Aperture: Fresnel Diffraction

- A point on the central axis:

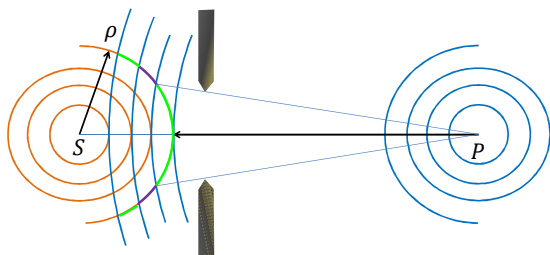


Circular Aperture: Fresnel Diffraction

- A point that is not on the central axis:

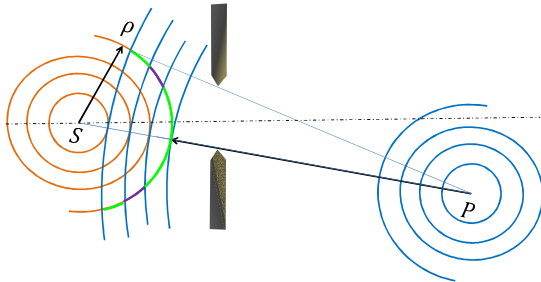


Circular Aperture: Fresnel Diffraction

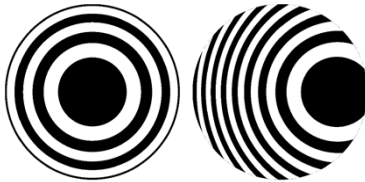

- There will also be light and dark fringes off the central axis

Circular Aperture: Fresnel Diffraction

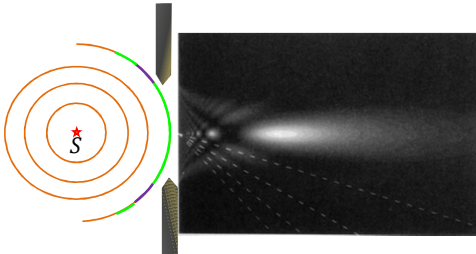

Circular Obstacle: Fresnel Diffraction

- A circular obstacle will remove the middle zones, but the remaining zones can interfere constructively and destructively

$$E = |E_{\ell+1}| - |E_{\ell+2}| + |E_{\ell+3}| \dots \pm |E_m|$$


- As in the case of the unobstructed wave, only the first unobstructed zone contributes:

$$E \approx \frac{|E_{\ell+1}|}{2}$$

- There should be a bright spot on the central axis


Poisson Bright Spot

- Poisson thought this result seemed absurd and dismissed Fresnel's paper
- Arago checked and found the bright spot:




Diffraction around a 1/8" ball bearing

Diffraction from an Edge

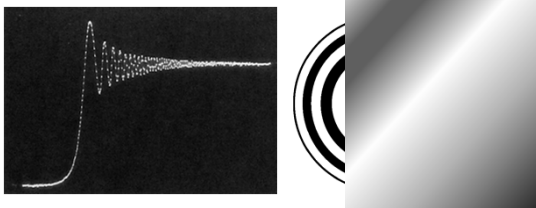


- The edge does not form a distinct shadow

Diffraction from an Edge

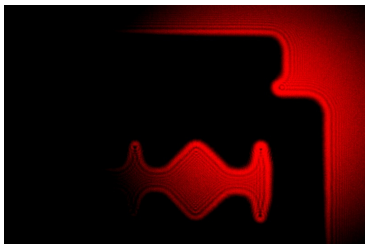


Fresnel Zone Plate

- Suppose we obscure only the even-numbered zones
 $E = |E_1| + |E_2| + |E_5| + \dots + |E_m|$
- The electric field at the origin is $2m$ times that of the unobstructed light
- What radii do we need to make some annular rings that block only the even-numbered zones?



Fresnel Zone Plate




$$\begin{aligned}
 (\rho_m + r_m) - (\rho_0 - r_0) &= \frac{m\lambda}{2} \\
 \rho_m &= \sqrt{\rho_0^2 + R_m^2} \approx \rho_0 + \frac{R_m^2}{2\rho_0} \\
 r_m &= \sqrt{r_0^2 + R_m^2} \approx r_0 + \frac{R_m^2}{2r_0} \\
 \frac{1}{\rho_0} + \frac{1}{r_0} &\approx \frac{m\lambda}{R_m^2} = \frac{1}{f} \quad \text{This looks like the lens equation...}
 \end{aligned}$$

Fresnel Zone Plates

- There are also higher-order focal points:

$$f_m = \frac{1}{m} f_1$$



- Not an ideal lens
 - Works only for one wavelength (large chromatic aberration)
- But applicable to a wide range of wavelengths
 - Does not rely on weird atomic properties of transparent materials

Fresnel Zone Plate

$$R_m \approx \sqrt{mf\lambda}$$

- For green light, $\lambda = 500 \text{ nm}$
- Suppose $\rho_0 = r_0 = 10 \text{ cm}$
 - Then $R_1 = 0.223 \text{ mm}$, $R_2 = 0.316 \text{ mm}$, etc...
- But this also works for x-rays: $\lambda \sim 0.1 \text{ nm}$
 - Then $R_1 = 3.16 \text{ } \mu\text{m}$, $R_2 = 4.47 \text{ } \mu\text{m}$
- Challenges: very small spacing, but needs to be thick enough to absorb x-rays.